


BECKHOFF

CB4021

Manual

rev. 1.6

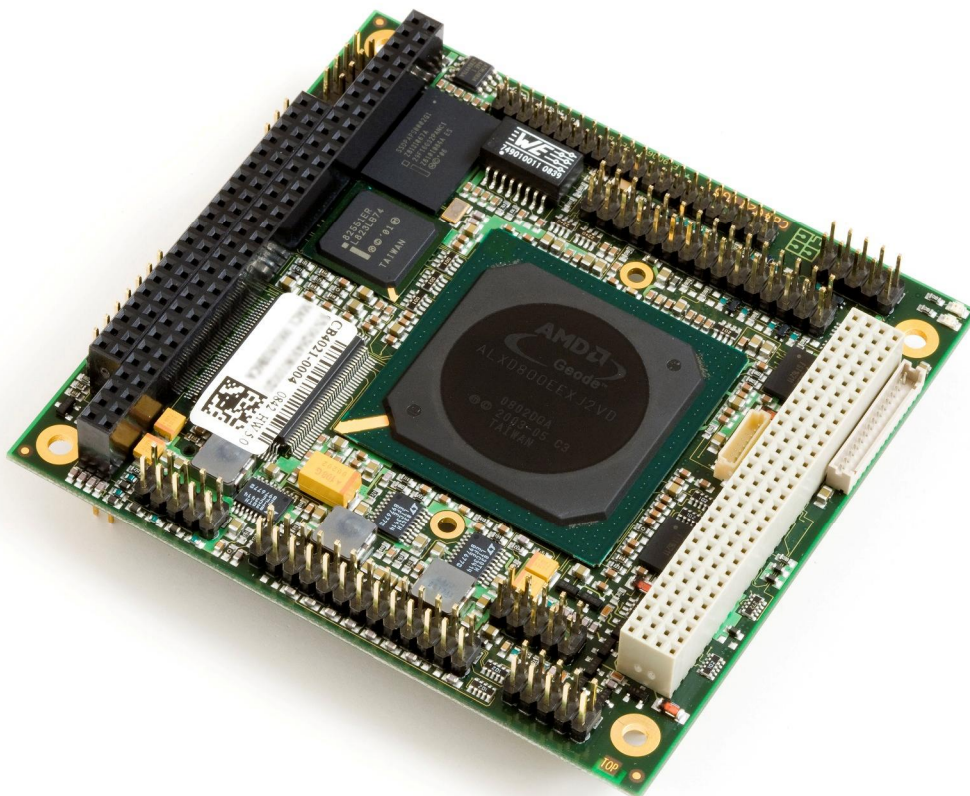

Contents

0	Document History	5
1	Introduction.....	6
1.1	Notes on the Documentation	6
1.1.1	Liability Conditions	6
1.1.2	Copyright	6
1.2	Safety Instructions.....	7
1.2.1	Disclaimer	7
1.2.2	Description of Safety Symbols.....	7
1.3	Essential Safety Measures	8
1.3.1	Operator's Obligation to Exercise Diligence	8
1.3.2	National Regulations Depending on the Machine Type	8
1.3.3	Operator Requirements	8
1.4	Functional Range	9
2	Overview	10
2.1	Standard Features.....	10
2.2	Specifications and Documents.....	12
3	Detailed Description.....	13
3.1	Power Supply	13
3.2	CPU	13
3.3	Memory	13
4	Connectors	14
4.1	Connector Map.....	14
4.2	Power Supply	15
4.3	System.....	16
4.4	Memory	17
4.5	PC/104-Bus.....	20
4.6	PC/104-Plus Bus	22
4.7	VGA	24
4.8	LCD.....	25
4.9	USB 1 to 4, LAN, Sound	26
4.10	IDE Interface	28
4.11	Parallel Interface LPT	29
4.12	Serial Interface COM1	30
4.13	Serial Interface COM2	31
4.14	SMBus	32
4.15	Monitoring Functions	33
4.16	Fan	34
5	BIOS Settings	35
5.1	Remarks for Setup Use	35
5.2	Top Level Menu.....	35
5.3	Standard CMOS Features	36
5.3.1	IDE Primary Master/Slave	37
5.4	Advanced BIOS Features	38
5.4.1	Hard Disk Boot Priority	40
5.5	Advanced Chipset Features.....	41
5.5.1	PC Health Status.....	43

Contents

5.5.2	TV Output Configuration	44
5.6	Integrated Peripherals	45
5.7	Power Management Setup	47
5.7.1	IRQ Wakeup Events	48
5.8	PnP/PCI Configuration.....	50
5.8.1	IRQ Resources.....	51
5.8.2	Memory Resources	52
5.9	PC Health Status.....	53
5.10	Load Fail-Safe Defaults	54
5.11	Load Optimized Defaults	54
5.12	Set Password	54
5.13	Save & Exit Setup	54
5.14	Exit Without Saving	54
6	BIOS update.....	55
7	Mechanical Drawing.....	56
7.1	PCB: Mounting Holes	56
7.2	PCB: Pin 1 Dimensions	57
8	Technical Data.....	58
8.1	Electrical Data	58
8.2	Environmental Conditions.....	58
8.3	Thermal Specifications	59
9	Support and Service	60
9.1	Beckhoff's Branch Offices and Representatives	60
9.2	Beckhoff Headquarters.....	60
9.2.1	Beckhoff Support.....	60
9.2.2	Beckhoff Service	60
I	Annex: Post-Codes.....	61
II	Annex: Resources	64
A	IO Range.....	64
B	Memory Range.....	64
C	Interrupt.....	64
D	PCI Devices.....	65
E	SMB Devices.....	65

0 Document History

Version	Changes
0.1	first preliminary release
0.2	added LX900, numbering of USB channels starts at 1 everywhere
0.3	updated table of SMB devices
1.0	corrections to the SO-DIMM200 pinout (no ECC)
1.1	new images, SSD included, new connector map, 16bit ISA possible, temperature ranges, several minor changes
1.2	updated block diagram (LX800 only), COM signal levels
1.3	updated contact details, minor changes
1.4	added pinout for RS-422/RS-485 COM soldering option, minor changes
1.5	minor changes
1.6	updated contact details



NOTE

All company names, brand names, and product names referred to in this manual are registered or unregistered trademarks of their respective holders and are, as such, protected by national and international law.

1 Introduction

1.1 Notes on the Documentation

This description is only intended for the use of trained specialists in control and automation engineering who are familiar with the applicable national standards. It is essential that the following notes and explanations are followed when installing and commissioning these components.

1.1.1 Liability Conditions

The responsible staff must ensure that the application or use of the products described satisfy all the requirements for safety, including all the relevant laws, regulations, guidelines and standards. The documentation has been prepared with care. The products described are, however, constantly under development. For that reason the documentation is not in every case checked for consistency with performance data, standards or other characteristics. None of the statements of this manual represents a guarantee (Garantie) in the meaning of § 443 BGB of the German Civil Code or a statement about the contractually expected fitness for a particular purpose in the meaning of § 434 par. 1 sentence 1 BGB. In the event that it contains technical or editorial errors, we retain the right to make alterations at any time and without warning. No claims for the modification of products that have already been supplied may be made on the basis of the data, diagrams and descriptions in this documentation.

1.1.2 Copyright

© This documentation is copyrighted. Any reproduction or third party use of this publication, whether in whole or in part, without the written permission of Beckhoff Automation GmbH, is forbidden.

1.2 Safety Instructions

Please consider the following safety instructions and descriptions. Product specific safety instructions are to be found on the following pages or in the areas mounting, wiring, commissioning etc.

1.2.1 Disclaimer

All the components are supplied in particular hardware and software configurations appropriate for the application. Modifications to hardware or software configurations other than those described in the documentation are not permitted, and nullify the liability of Beckhoff Automation GmbH.

1.2.2 Description of Safety Symbols

The following safety symbols are used in this documentation. They are intended to alert the reader to the associated safety instructions.



ACUTE RISK OF INJURY!

If you do not adhere to the safety advise next to this symbol, there is immediate danger to life and health of individuals!



RISK OF INJURY!

If you do not adhere to the safety advise next to this symbol, there is danger to life and health of individuals!



HAZARD TO INDIVIDUALS, ENVIRONMENT, DEVICES, OR DATA!

If you do not adhere to the safety advise next to this symbol, there is obvious hazard to individuals, to environment, to materials, or to data.



NOTE OR POINTER

This symbol indicates information that contributes to better understanding.

1.3 Essential Safety Measures

1.3.1 Operator's Obligation to Exercise Diligence

The operator must ensure that

- o the product is only used for its intended purpose
- o the product is only operated in sound condition and in working order
- o the instruction manual is in good condition and complete, and always available for reference at the location where the products are used
- o the product is only used by suitably qualified and authorised personnel
- o the personnel is instructed regularly about relevant occupational safety and environmental protection aspects
- o the operating personnel is familiar with the operating manual and in particular the safety notes contained herein

1.3.2 National Regulations Depending on the Machine Type

Depending on the type of machine and plant in which the product is used, national regulations governing the controllers of such machines will apply, and must be observed by the operator. These regulations cover, amongst other things, the intervals between inspections of the controller. The operator must initiate such inspections in good time.

1.3.3 Operator Requirements

- o Read the operating instructions

All users of the product must have read the operating instructions for the system they work with.

- o System know-how

All users must be familiar with all accessible functions of the product.

1.4 Functional Range




NOTE

The descriptions contained in the present documentation represent a detailed and extensive product description. As far as the described motherboard was acquired as an integral component of an Industrial PC from Beckhoff Automation GmbH, this product description shall be applied only in limited scope. Only the contractually agreed specifications of the corresponding Industrial PC from Beckhoff Automation GmbH shall be relevant. Due to several models of Industrial PCs, variations in the component placement of the motherboards are possible. Support and service benefits for the built-in motherboard will be rendered by Beckhoff Automation GmbH exclusively as specified in the product description (inclusive operation system) of the particular Industrial PC.

2 Overview

2.1 Standard Features

The CB4021 is a highly complex PC/104-Plus board with the functionalities of a motherboard. Based on the AMD® Geode® CS5536 chipset it is equipped with an AMD® Geode® LX800 CPU, up to 1 GByte RAM (DDR-400) memory capacity via SO-DIMM200, PCI and ISA bus and additional peripheral devices such as two serial interfaces, one printer interface, LAN connection, audio in and out, four USB interfaces, CRT, TFT and IDE connection. As an option the board can be equipped with an onboard SSD with 2, 4 or 8 GB capacity (IDE master).

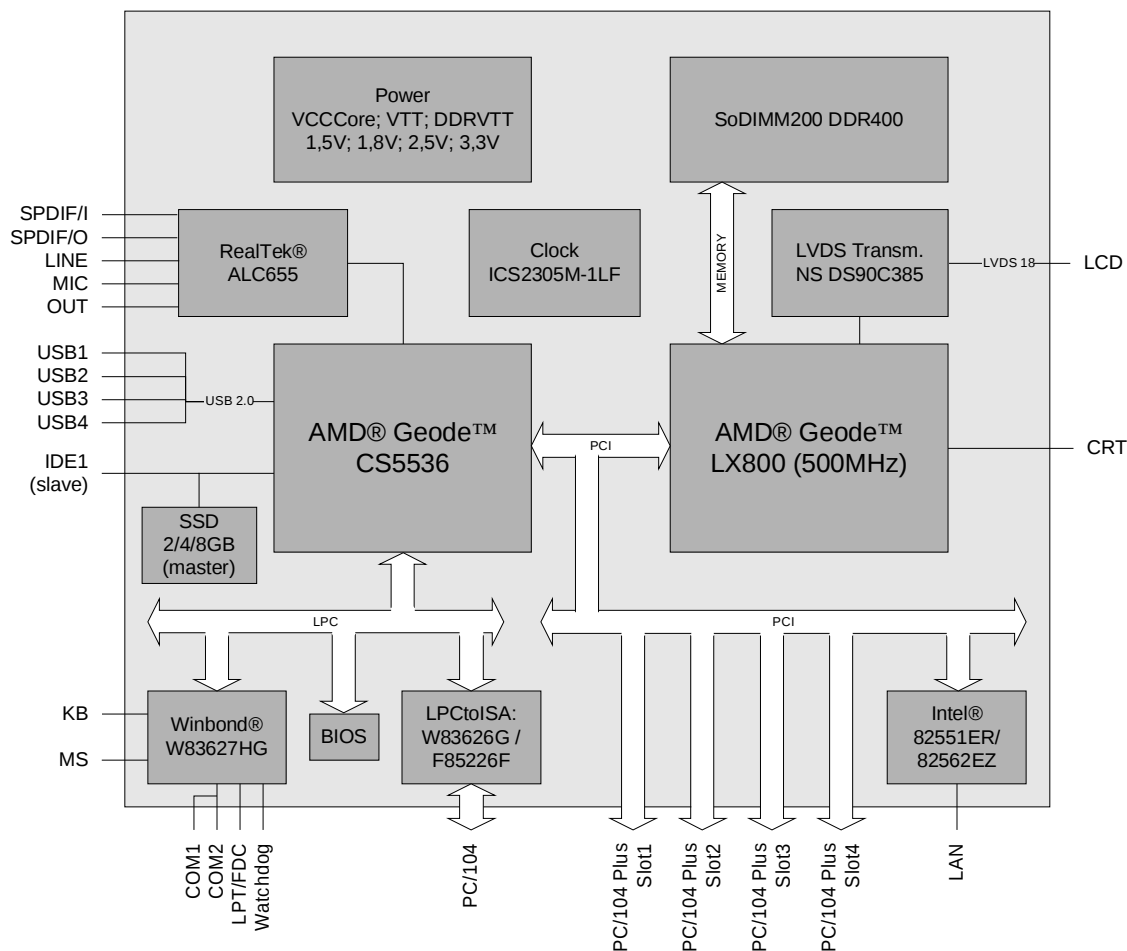

- o Processor AMD® Geode® LX800 (500MHz)
- o Chipset AMD® Geode® CS5536
- o SO-DIMM200 socket for up to 1 GByte of RAM (DDR-400)
- o Two serial interfaces COM1 and COM2
- o LAN interface Ethernet 10/100 (Base-T)
- o IDE interface
- o Option: SSD flash disk of 2, 4 or 8GB (IDE master)
- o PS2 keyboard / mouse interface
- o LPT interface
- o Four USB 2.0 interfaces (3x host, 1x host/device)
- o AWARD® BIOS 6.10
- o CRT connection

- o TFT connection, LVDS 18Bit
- o AC97 compatible sound controller with SPDIF in and out
- o RTC with external CMOS battery
- o 5V single supply voltage
- o ISA via PC/104 connector
- o PCI via PC/104-Plus connector
- o Size: 96 mm x 90 mm

2.2 Specifications and Documents

In making this manual and for further reading of technical documentation the following documents, specifications and web-pages were used and are recommended.

- § ISA specification
IEEE996P
www.ieee.org
- § PC/104™ specification
Version 2.5
www.pc104.org
- § PC/104-Plus™ specification
Version 2.0
www.pc104.org
- § PCI specification
Version 2.3 and 3.0
www.pcisig.com
- § ACPI specification
Version 3.0
www.acpi.info
- § ATA/ATAPI specification
Version 7 Rev. 1
www.t13.org
- § USB specifications
www.usb.org
- § SM-Bus specification
Version 2.0
www.smbus.org
- § AMD® chip description
CS5536® Datasheet
www.amd.com
- § AMD® chip description
Geode® LX Processors Data Book
www.amd.com
- § Winbond® chip description
W83627HG Datasheet
www.winbond-usa.com or www.winbond.com.tw
- § Winbond® chip description
W83626G Datasheet
www.winbond-usa.com or www.winbond.com.tw
- § Intel® chip description
82551ER Datasheet
www.intel.com
- § National Semiconductor® chip description
DS90C385 Datasheet
www.national.com

3 Detailed Description

3.1 Power Supply

The power supply of the hardware module is effected via the power connector. The board only requires an operating voltage of 5 volt $\pm$ 5%, it is not necessary to connect all indicated voltages. Additional voltages may only be necessary for PC/104 expansion cards. For safety reasons it is recommended to connect all power pins of the PC/104 connector to the power supply as well.

3.2 CPU

The board comes with an AMD® Geode® LX800 CPU running at a clock speed of 500MHz. The package type allows operation under a maximum case temperature of 60 degrees Celsius (extended temperature range on request) and accords highest possible security even in rough environment. The processor includes a second level cache of 128 KByte. Furthermore, all Geode® LX processors offer many features known from the desktop range such as MMX®, 3DNow!®, loadable microcode etc.

3.3 Memory


There is one conventional SO-DIMM200 socket available to equip the board with memory. For mechanical reasons it is possible that particular memory modules cannot be employed. Please ask your sales representative for recommended memory modules.

With currently available SO-DIMM200 modules a memory extension up to 1 GByte is possible (DDR-400).

4 Connectors

4.1 Connector Map

Please use the connector map below for quick reference. Only connectors on the component side are shown. For more information on each connector refer to the table below.

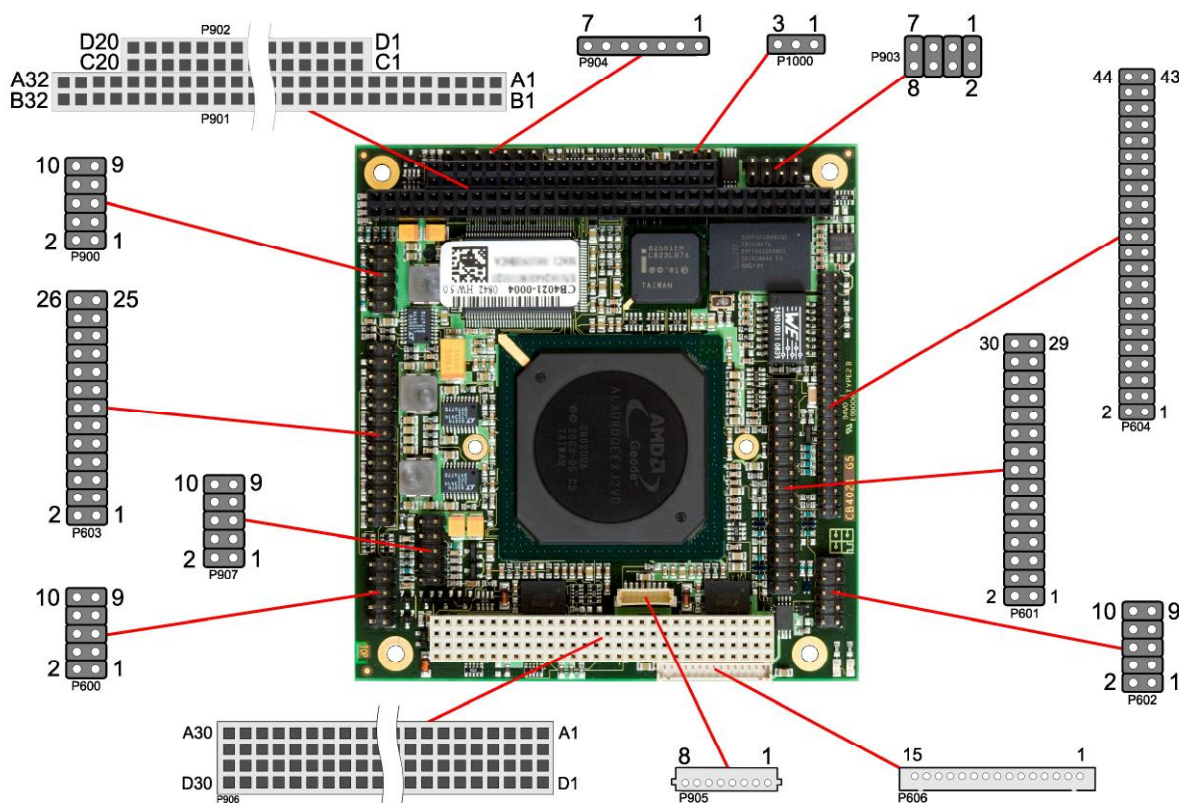

Ref-No.	Function	Page
U303*	"Memory"	p. 17
P600	"Serial Interface COM1"	p. 30
P601	"USB 1 to 4, LAN, Sound"	p. 26
P602	"Serial Interface COM2"	p. 31
P603	"Parallel Interface LPT"	p. 29
P604	"IDE Interface"	p. 28
P606	"LCD"	p. 25
P900	"System"	p. 16
P901	"PC/104-Bus"	p. 20
P902	"PC/104-Bus"	p. 20
P903	"Power Supply"	p. 15
P904	"SMBus"	p. 32
P905	"Monitoring Functions"	p. 33
P906	"PC/104-Plus Bus"	p. 22
P907	"VGA"	p. 24
P1000	"Fan"	p. 34

* not in the picture above (cf. bottom side of board)

4.2 Power Supply

The connector for the power supply is a standard IDC socket connector with a spacing of 2.54 mm. The board only requires an operating voltage of 5 volt $\pm$ 5%. 3.3V output to the PC/104-Plus bus is the only off-board supply available.


Should additional voltages be needed for PC/104 expansion cards, these must be provided externally by connecting the respective pins (see below).

For maximum current availability, it is recommended to use both this power connector and the PC/104 connector for power supply.



NOTE

For "Real Time Clock" an external battery (3.3V) must be connected. You can use pins 1 & 3 here or the "System" connector (see next page).

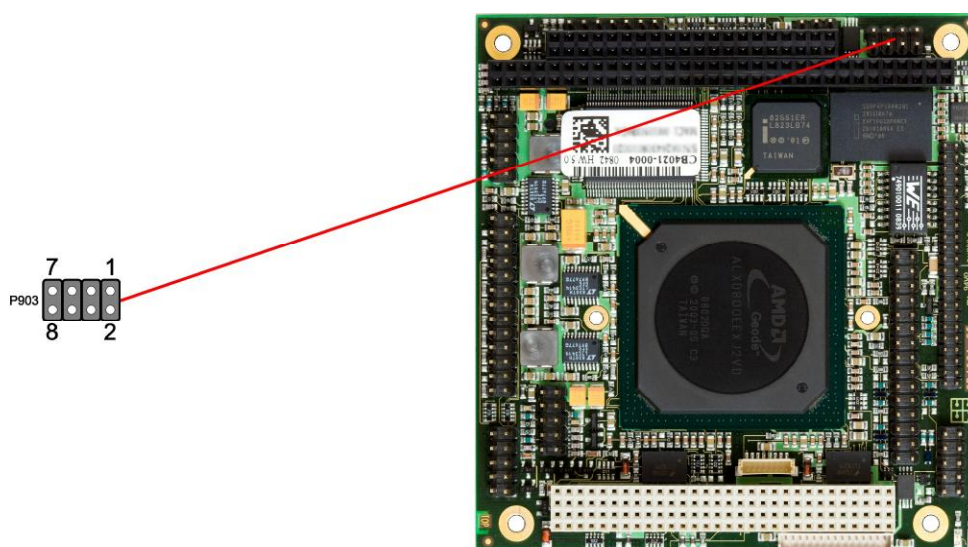

Description	Name	Pin		Name	Description
ground	GND	1	2	VCC	5 volt supply
CMOS battery $\geq$ 3 volt	VBAT	3	4	12V	12 volt supply
-5 volt supply	-5V	5	6	-12V	-12 volt supply
ground	GND	7	8	VCC	5 volt supply

4.3 System


The system connector, which has the main functions that are necessary to start the board, is provided via a standard IDC socket connector with a spacing of 2.54 mm.

This connector supports the following interfaces: PS/2 keyboard, PS/2 mouse, speaker, external RTC-battery and reset of the board.



NOTE



For "Real Time Clock" an external battery (3.3V) must be connected. Connect "+" to VBAT and "-" to GND.

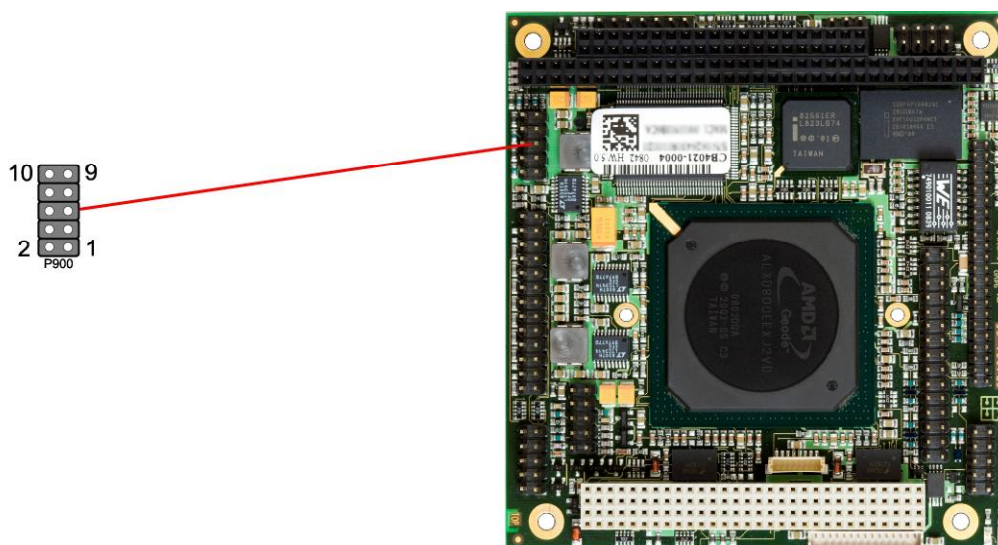

Description	Name	Pin		Name	Description
speaker to 5 volt	SPEAKER	1	2	GND	ground
reset to ground	RESET#	3	4	KLOCK#	keyboard lock
keyboard Data	KDAT	5	6	KCLK	keyboard clock
mouse data	MDAT	7	8	MCLK	mouse clock
CMOS battery ≥ 3 volt	VBAT	9	10	VCC	5 volt supply

4.4 Memory

There is one conventional SO-DIMM200 socket available to equip the board with memory (DDR-400). It is located on the bottom side of the board. For mechanical reasons it is possible that particular memory modules cannot be employed. Please ask your sales representative for recommended memory modules. With currently available SO-DIMM modules a memory extension up to 1 GByte is possible. The timing parameters for different memory modules are automatically set by BIOS.

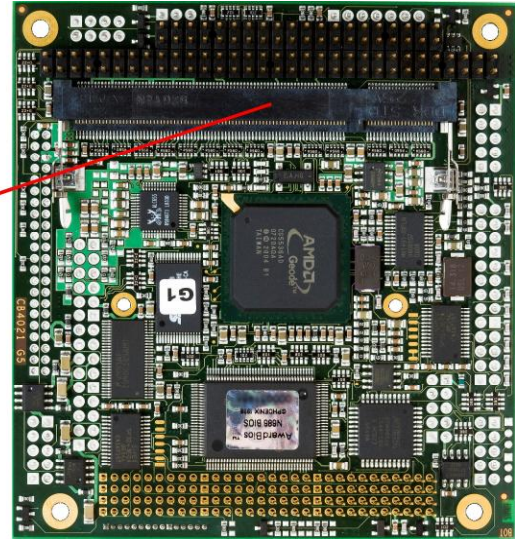


Description	Name	Pin		Name	Description
memory reference current	REF	1	2	REF	memory reference current
ground	GND	3	4	GND	ground
data 0	DQ0	5	6	DQ4	data 4
data 1	DQ1	7	8	DQ5	data 5
2.5 volt supply	2.5V	9	10	2.5V	2.5 volt supply
data strobe 0	DQS0	11	12	DQM0	data mask 0
data 2	DQ2	13	14	DQ6	data 6
ground	GND	15	16	GND	ground
data 3	DQ3	17	18	DQ7	data 7
data 8	DQ8	19	20	DQ12	data 12
2.5 volt supply	2.5V	21	22	2.5V	2.5 volt supply
data 9	DQ9	23	24	DQ13	data 13
data strobe 1	DQS1	25	26	DQM1	data mask 1
ground	GND	27	28	GND	ground
data 10	DQ10	29	30	DQ14	data 14
data 11	DQ11	31	32	DQ15	data 15
2.5 volt supply	2.5V	33	34	2.5V	2.5 volt supply
clock	CK0	35	36	2.5V	2.5 volt supply
clock	CK0#	37	38	2.5V	2.5 volt supply
ground	GND	39	40	GND	ground
data 16	DQ16	41	42	DQ20	data 20
data 17	DQ17	43	44	DQ21	data 21
2.5 volt supply	2.5V	45	46	2.5V	2.5 volt supply
data strobe 2	DQS2	47	48	DQM2	data mask 2
data 18	DQ18	49	50	DQ22	data 22
ground	GND	51	52	GND	ground

Description	Name	Pin		Name	Description
data 19	DQ19	53	54	DQ23	data 23
data 24	DQ24	55	56	DQ28	data 28
2.5 volt supply	2.5V	57	58	2.5V	2.5 volt supply
data 25	DQ25	59	60	DQ29	data 29
data strobe 3	DQS3	61	62	DQM3	data mask 3
ground	GND	63	64	GND	ground
data 26	DQ26	65	66	DQ30	data 30
data 27	DQ27	67	68	DQ31	data 31
2.5 volt supply	2.5V	69	70	2.5V	2.5 volt supply
data check bit 0	CB0	71	72	N/C	reserved
reserved	N/C	73	74	N/C	reserved
ground	GND	75	76	GND	ground
data strobe 8	DQS8	77	78	DQM8	data mask 8
reserved	N/C	79	80	N/C	reserved
2.5 volt supply	2.5V	81	82	2.5V	2.5 volt supply
reserved	N/C	83	84	N/C	reserved
reserved	N/C	85	86	N/C	reserved
ground	GND	87	88	GND	ground
clock	CK2	89	90	GND	ground
clock	CK2#	91	92	2.5V	2.5 volt supply
2.5 volt supply	2.5V	93	94	2.5V	2.5 volt supply
clock enables	CKE	95	96	CKE	clock enables
address 13	A13	97	98	N/C	reserved
address 12	A12	99	100	A11	address 11
address 9	A9	101	102	A8	address 8
ground	GND	103	104	GND	ground
address 7	A7	105	106	A6	address 6
address 5	A5	107	108	A4	address 4
address 3	A3	109	110	A2	address 2
address 1	A1	111	112	A0	address 0
2.5 volt supply	2.5V	113	114	2.5V	2.5 volt supply
address 10	A10	115	116	BA1	SDRAM bank 1
SDRAM bank 0	BA0	117	118	RAS#	row address strobe
write enable	WE#	119	120	CAS#	column address strobe
chip select	S0#	121	122	S1#	chip select
reserved	N/C	123	124	N/C	reserved
ground	GND	125	126	GND	ground
data 32	DQ32	127	128	DQ36	data 36
data 33	DQ33	129	130	DQ37	data 37
2.5 volt supply	2.5V	131	132	2.5V	2.5 volt supply
data strobe 4	DQS4	133	134	DQM4	data mask 4
data 34	DQ34	135	136	DQ38	data 38
ground	GND	137	138	GND	ground
data 35	DQ35	139	140	DQ39	data 39
data 40	DQ40	141	142	DQ44	data 44
2.5 volt supply	2.5V	143	144	2.5V	2.5 volt supply
data 41	DQ41	145	146	DQ45	data 45
data strobe 5	DQS5	147	148	DQM5	data mask 5
ground	GND	149	150	GND	ground
data 42	DQ42	151	152	DQ46	data 46
data 43	DQ43	153	154	DQ47	data 47
2.5 volt supply	2.5V	155	156	2.5V	2.5 volt supply
2.5 volt supply	2.5V	157	158	CK1#	clock
ground	GND	159	160	CK1	clock
ground	GND	161	162	GND	ground

Description	Name	Pin		Name	Description
data 48	DQ48	163	164	DQ52	data 52
data 49	DQ49	165	166	DQ53	data 53
2.5 volt supply	2.5V	167	168	2.5V	2.5 volt supply
data strobe 6	DQS6	169	170	DQM6	data mask 6
data 50	DQ50	171	172	DQ54	data 54
ground	GND	173	174	GND	ground
data 51	DQ51	175	176	DQ55	data 55
data 56	DQ56	177	178	DQ60	data 60
2.5 volt supply	2.5V	179	180	2.5V	2.5 volt supply
data 57	DQ57	181	182	DQ61	data 61
data strobe 7	DQS7	183	184	DQM7	data mask 7
ground	GND	185	186	GND	ground
data 58	DQ58	187	188	DQ62	data 62
data 59	DQ59	189	190	DQ63	data 63
2.5 volt supply	2.5V	191	192	2.5V	2.5 volt supply
SPD data	SDA	193	194	SA0	SPD address
SPD clock	SCL	195	196	SA1	SPD address
3.3 volt supply	3.3V	197	198	SA2	SPD address
reserved	N/C	199	200	N/C	reserved

4.5 PC/104-Bus

An onboard LPC-to-ISA bridge (Fintek® F85226F) makes it possible to expand the functionality of the board with additional PC/104 cards. This interface offers full 16bit ISA compliance. For further information on this interface please refer to the PC/104 specifications (see "Specifications and Documents", p. 12).

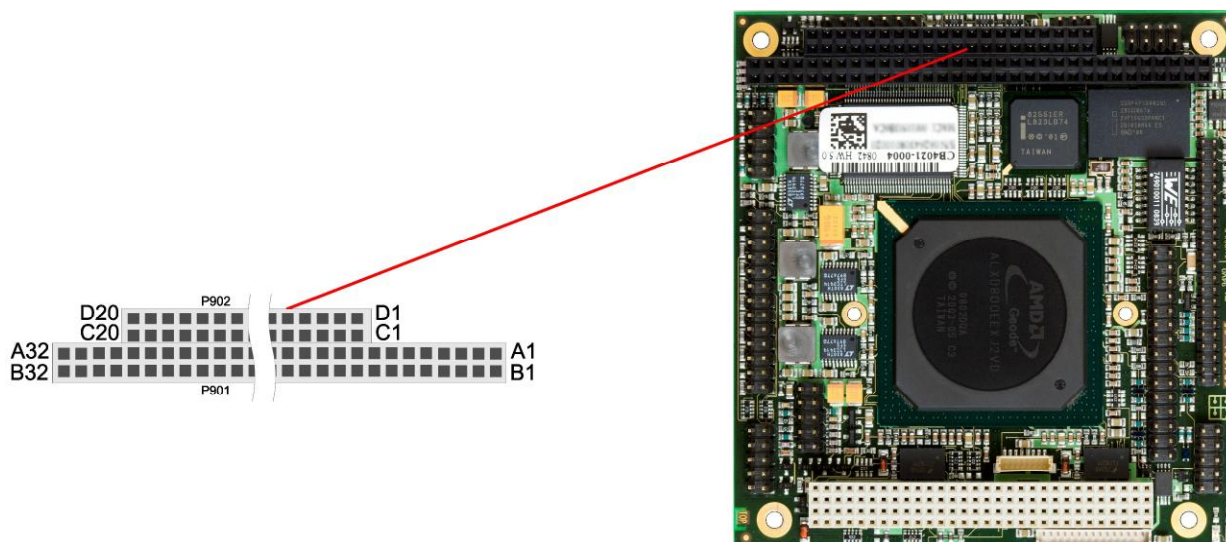

Pinning of the standard 8 bit PC/104 connector.

Description	Name	Pin		Name	Description
ISA - IO channel check	IOCHK#	A1	B1	GND	ground
ISA – data 7	SD7	A2	B2	RSTDRV	reset drive
ISA – data 6	SD6	A3	B3	VCC	5 volt supply
ISA – data 5	SD5	A4	B4	IRQ9	ISA – interrupt 9 (2)
ISA – data 4	SD4	A5	B5	-5V	-5 volt supply
ISA – data 3	SD3	A6	B6	DRQ2	ISA – DMA request 2
ISA – data 2	SD2	A7	B7	-12V	-12 volt supply
ISA – data 1	SD1	A8	B8	IOCHRDY	ISA – IO channel ready
ISA – data 0	SD0	A9	B9	12V	12 volt supply
ISA – IO channel ready	IOCHRDY	A10	B10	N/C	reserved
ISA – address enable	AEN	A11	B11	SMEMW#	ISA – system memory write
ISA – address 19	SA19	A12	B12	SMEMR#	ISA – system memory read
ISA – address 18	SA18	A13	B13	IOW#	ISA – IO write
ISA – address 17	SA17	A14	B14	IOR#	ISA – IO read
ISA – address 16	SA16	A15	B15	DACK3#	ISA – DMA acknowledge 3
ISA – address 15	SA15	A16	B16	DRQ3	ISA – DMA request 3
ISA – address 14	SA14	A17	B17	DACK1#	ISA – DMA acknowledge 1
ISA – address 13	SA13	A18	B18	DRQ1	ISA – DMA request 1
ISA – address 12	SA12	A19	B19	REFRESH#	ISA – refresh
ISA – address 11	SA11	A20	B20	SYSCLK	ISA – system clock
ISA – address 10	SA10	A21	B21	IRQ7	ISA – interrupt 7
ISA – address 9	SA9	A22	B22	IRQ6	ISA – interrupt 6
ISA – address 8	SA8	A23	B23	IRQ5	ISA – interrupt 5
ISA – address 7	SA7	A24	B24	IRQ4	ISA – interrupt 4
ISA – address 6	SA6	A25	B25	IRQ3	ISA – interrupt 3
ISA – address 5	SA5	A26	B26	DACK2#	ISA – DMA acknowledge 2
ISA – address 4	SA4	A27	B27	T/C	ISA – terminal count
ISA – address 3	SA3	A28	B28	BALE	ISA – address latch en.

Description	Name	Pin		Name	Description
ISA – address 2	SA2	A29	B29	VCC	5 volt supply
ISA – address 1	SA1	A30	B30	OSC	ISA – 14,318MHz
ISA – address 0	SA0	A31	B31	GND	ground
ground	GND	A32	B32	GND	ground



Pinning of the 16 bit expansion PC/104 connector.

Description	Name	Pin		Name	Description
ground	GND	C0	D0	GND	ground
ISA – byte high enable	SBHE#	C1	D1	MEMCS16#	ISA – memory chip select
ISA – latched address 23	LA23	C2	D2	IOCS16#	ISA – IO chip select
ISA – latched address 22	LA22	C3	D3	IRQ10	ISA – interrupt 10
ISA – latched address 21	LA21	C4	D4	IRQ11	ISA – interrupt 11
ISA – latched address 20	LA20	C5	D5	IRQ12	ISA – interrupt 12
ISA – latched address 19	LA19	C6	D6	IRQ15	ISA – interrupt 15
ISA – latched address 18	LA18	C7	D7	IRQ14	ISA – interrupt 14
ISA – latched address 17	LA17	C8	D8	DACK0#	ISA – DMA acknowledge 0
ISA – memory read	MEMR#	C9	D9	DRQ0	ISA – DMA request 0
ISA – memory write	MEMW#	C10	D10	DACK5#	ISA – DMA acknowledge 5
ISA – data 8	SD8	C11	D11	DRQ5	ISA – DMA request 5
ISA – data 9	SD9	C12	D12	DACK6#	ISA – DMA acknowledge 6
ISA – data 10	SD10	C13	D13	DRQ6	ISA – DMA request 6
ISA – data 11	SD11	C14	D14	DACK7#	ISA – DMA acknowledge 7
ISA – data 12	SD12	C15	D15	DRQ7	ISA – DMA request 7
ISA – data 13	SD13	C16	D16	VCC	5 volt supply
ISA – data 14	SD14	C17	D17	MASTER#	ISA – bus master
ISA – data 15	SD15	C18	D18	GND	ground
reserved	N/C	C19	D19	GND	ground

4.6 PC/104-Plus Bus

Expansion cards can be connected to the board using the PCI connector first introduced with the PC/104-Plus standard. A maximum of four PC/104-Plus cards are supported.

The interrupt routing and the IDSEL signals for the expansion cards are specified in the PC/104-Plus specification (see "Specifications and Documents", p. 12).

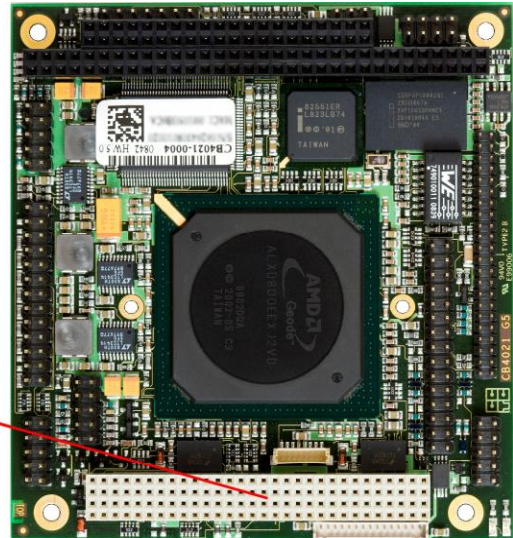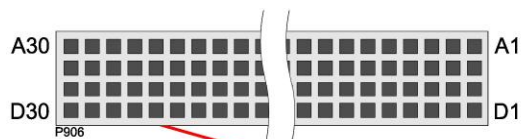


Description	Name	Pin	Name	Description
ground	GND	A1	B1	N/C
5 volt - IO buffer power	VCCIO	A2	B2	AD2
PCI – address/data 5	AD5	A3	B3	GND
PCI – com/byte enable 0	CBE0#	A4	B4	AD7
ground	GND	A5	B5	AD9
PCI – address/data 11	AD11	A6	B6	VCCIO
PCI – address/data 14	AD14	A7	B7	AD13
3.3 volt supply	3.3V	A8	B8	CBE1#
PCI – system error	SERR#	A9	B9	GND
ground	GND	A10	B10	PERR#
PCI – stop	stop#	A11	B11	3.3V
3.3 volt supply	3.3V	A12	B12	TRDY#
PCI – frame	FRAME#	A13	B13	GND
ground	GND	A14	B14	AD16
PCI – address/data 18	AD18	A15	B15	3.3V
PCI – address/data 21	AD21	A16	B16	AD20
3.3 volt supply	3.3V	A17	B17	AD23
PCI – ID select slot 1	IDSEL0	A18	B18	GND
PCI – address/data 24	AD24	A19	B19	CBE3#
ground	GND	A20	B20	AD26
PCI – address/data 29	AD29	A21	B21	VCC
5 volt supply	VCC	A22	B22	AD30
PCI – bus request slot 1	REQ0#	A23	B23	GND
ground	GND	A24	B24	REQ2#
PCI – bus grant slot 4	GNT1#	A25	B25	VCCIO
5 volt supply	VCC	A26	B26	CLK0
PCI – clock slot 3	CLK2	A27	B27	VCC
				5 volt supply

Description	Name	Pin		Name	Description
ground	GND	A28	B28	INTD#	PCI – interrupt D
12V supply	12V	A29	B29	INTA#	PCI – interrupt A
-12V supply	-12V	A30	B30	REQ3#	PCI – bus request slot 4
5 volt supply	VCC	C1	D1	AD0	PCI – address/data 0
PCI – address/data 1	AD1	C2	D2	VCC	5 volt supply
PCI – address/data 4	AD4	C3	D3	AD3	PCI – address/data 3
ground	GND	C4	D4	AD6	PCI – address/data 6
PCI – address/data 8	AD8	C5	D5	GND	ground
PCI – address/data 10	AD10	C6	D6	M66EN	PCI – 66MHz enable
ground	GND	C7	D7	AD12	PCI – address/data 12
PCI – address/data 15	AD15	C8	D8	3.3V	3.3 volt supply
reserved	N/C	C9	D9	PAR	PCI – parity bit
3.3 volt supply	3.3V	C10	D10	N/C	reserved
PCI – lock	LOCK#	C11	D11	GND	ground
ground	GND	C12	D12	DEVSEL#	PCI – device select
PCI – initiator ready	IRDY#	C13	D13	3.3V	3.3 volt supply
3.3 volt supply	3.3V	C14	D14	CBE2#	PCI – com/byte enable 2
PCI – address/data 17	AD17	C15	D15	GND	ground
ground	GND	C16	D16	AD19	PCI – address/data 19
PCI – address/data 22	AD22	C17	D17	3.3V	3.3 volt supply
PCI – ID select slot 2	IDSEL1	C18	D18	IDSEL2	PCI – ID select slot 3
5 volt - IO buffer power	VCCIO	C19	D19	IDSEL3	PCI – ID select slot 4
PCI – address/data 25	AD25	C20	D20	GND	ground
PCI – address/data 28	AD28	C21	D21	AD27	PCI – address/data 27
ground	GND	C22	D22	AD31	PCI – address/data 31
PCI – bus request slot 2	REQ1#	C23	D23	VCCIO	5 volt - IO buffer power
5 volt supply	VCC	C24	D24	GNT0#	PCI – bus grant slot 1
PCI – bus grant slot 3	GNT2#	C25	D25	GND	ground
ground	GND	C26	D26	CLK1	PCI – clock slot 2
PCI – clock slot 4	CLK3	C27	D27	GND	ground
5 volt supply	VCC	C28	D28	RST#	PCI – reset
PCI – interrupt B	INTB#	C29	D29	INTC#	PCI – interrupt C
PCI – bus grant slot 4	GNT3#	C30	D30	GND	ground

4.7 VGA

The CRT-VGA signals are provided by a standard IDC socket connector with a spacing of 2.54 mm. This interface allows the connection of a standard VGA-monitor. I2C communication is supported.

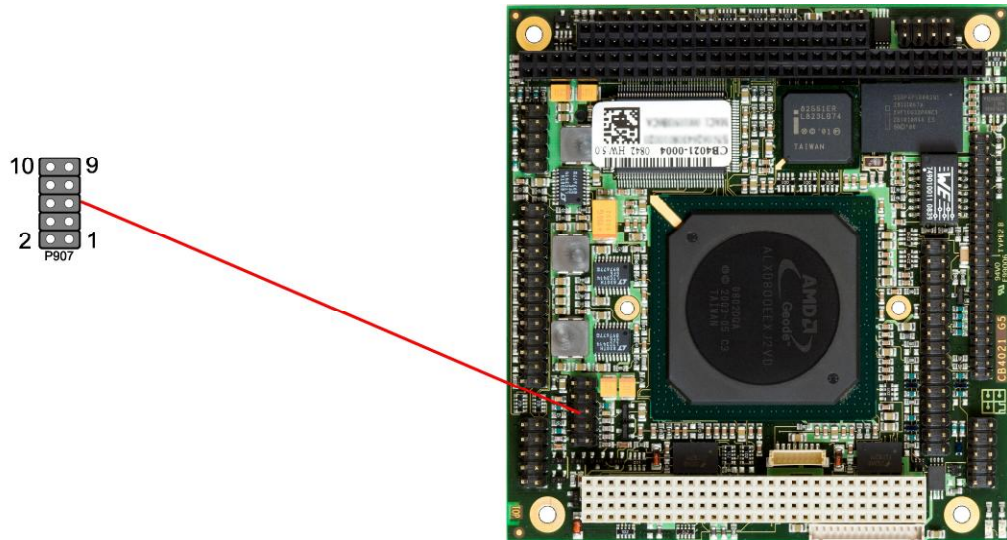


Description	Name	Pin		Name	Description
analog red	RED	1	2	GND	ground
analog green	GREEN	3	4	DDDA	DD data
analog blue	BLUE	5	6	DDCK	DD clock
vertikal sync	VSYNC	7	8	GND	ground
horizontal sync	HSYNC	9	10	GND	ground

4.8 LCD

The LCD is connected via a 15 pin connector (Hirose DF13-15P-DAS, mating connector: DF13-15S-xxx). The power supply for the display is also provided through this connector. The CB4021 board supports displays with LVDS interface. For displays with digital interface an extra receiver board is available. There is no support for DSTN displays.

With the LVDS interface it is possible to trigger LVDS displays with a maximum of 18 Bit colour depth and one pixel per clock.

The display type can be chosen over the BIOS setup. Please contact your sales representative regarding an appropriate cable to connect your display.

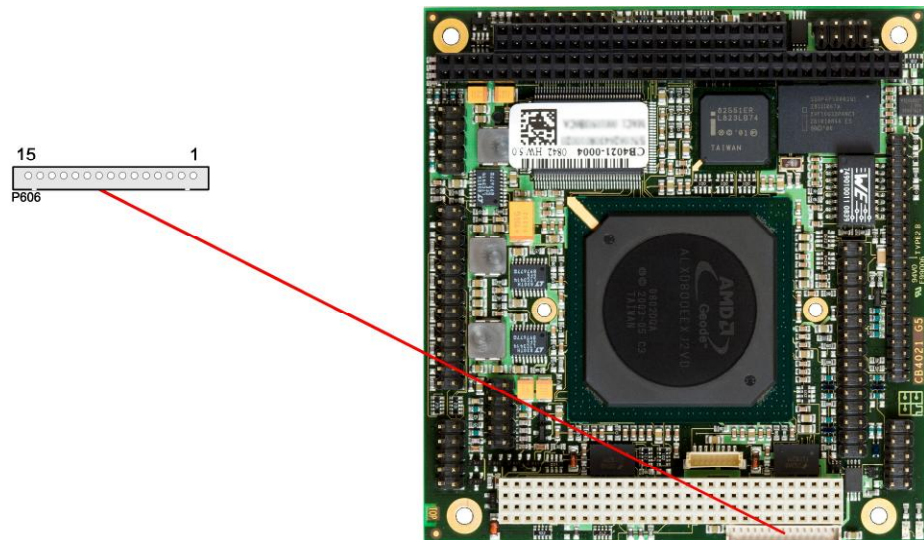

The following table shows the pin description for the first bit ("even" pixel).

Pin	Name	Description
1	GND	ground
2	GND	ground
3	TXO00#	LVDS even data 0 -
4	TXO00	LVDS even data 0 +
5	TXO01#	LVDS even data 1 -
6	TXO01	LVDS even data 1 +
7	TXO02#	LVDS even data 2 -
8	TXO02	LVDS even data 2 +
9	TXO0C#	LVDS even clock -
10	TXO0C	LVDS even clock +
11	TXO03#	LVDS even data 3 -
12	TXO03	LVDS even data 3 +
13	BL_VCC	switched 5 volt for backlight
14	FP_3.3V	switched 3.3 volt for display
15	FP_3.3V	switched 3.3 volt for display

4.9 USB 1 to 4, LAN, Sound

USB 1-4, LAN and sound are provided via a standard IDC socket connector with a spacing of 2.54 mm. Necessary settings can be accomplished in BIOS setup.

All USB-channels support USB 2.0. You may note that the setting of USB keyboard or USB mouse support in the BIOS-setup is only necessary and advisable, if the OS offers no USB-support. BIOS-setup can be changed with an USB keyboard without enabling USB keyboard support. Running a USB supporting OS (such as Microsoft® Windows®) with these features enabled may lead to significant performance or functionality limitations.

Every USB interface provides up to 500 mA current and is protected by an electronically resettable fuse. The LAN-interface on this connector supports 10BaseT and 100BaseT compatible network components with automatic bandwidth selection. Additional outputs are provided for status LEDs. Auto-negotiate and auto-cross functionality is available, PXE and RPL are available on request.



AC'97 - 2.3 compatible audio I/O is available on this connector. There are two ways to use these signals. Default functionality is the familiar audio in, audio out, and microphone (2-channel mode). OS dependent device drivers can switch these signals to support an 5.1 output; thus in this mode no audio input signals are available. In 2-channel mode LOUT is the only active audio output. Moth MIC inputs are available. In 6-channel mode the speaker outputs are: LOUT to Front, AUXA to Surround, MIC1 to Center and MIC2 to LFE (Sub).

The signals "SPDIFI" and "SPDIFO" provide digital input and output. If a transformation to a coaxial or optical connector is necessary this must be performed externally.



CAUTION

The same IDC socket connector supports all three devices and is not "keyed"! Misconnected support cables may short two devices together and damage the board. Please check diagrams before installing any connecting cables to ensure proper connection.

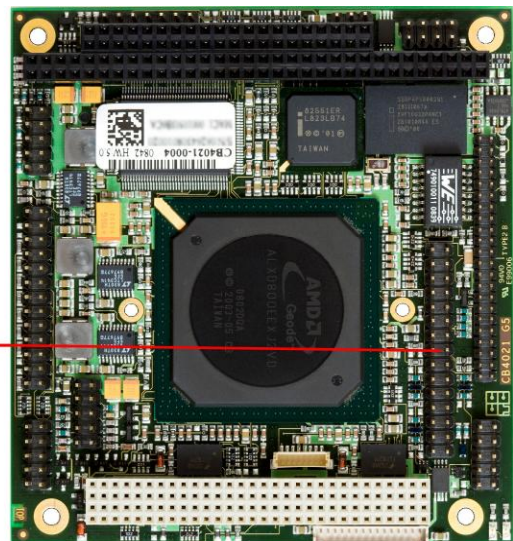

Description	Name	Pin		Name	Description
5 volt for USB1	USB1 VCC	1	2	USB2 VCC	5 volt for USB2
USB- channel 1	USB1#	3	4	USB2#	USB- channel 2
USB+ channel 1	USB1	5	6	USB2	USB+ channel 2
ground	GND	7	8	GND	ground
USB+ channel 3	USB3	9	10	USB4	USB+ channel 4
USB- channel 3	USB3#	11	12	USB4#	USB- channel 4
5 volt for USB3	USB3 VCC	13	14	USB4 VCC	5 volt for USB4
LAN activity	ACTLED	15	16	SPEEDLED	LAN 10/100 speed
LAN RX+	LANRX	17	18	LANTX	LAN TX+
LAN RX-	LANRX#	19	20	LANTX#	LAN TX-
digital output SPDIF	SPDIFO	21	22	3.3V	3.3 volt supply
digital input SPDIF	SPDIFI	23	24	S_AGND	analog ground sound
sound output right / frond output right	LOUT_R / FRONT_R	25	26	LOUT_L / FRONT_L	sound output left / frond output left
AUX input right / rear output right	AUXA_R / REAR_R	27	28	AUXA_L / REAR_L	AUX input left / rear output left
microphone input 1 / center output	MIC1 / CENTER	29	30	MIC2 / LFE	microphone input 2 / LFE output

**CAUTION**

Please keep in mind that both USB 2.0 and 100Mbit LAN require twisted and shielded cables to reliably maintain full speed data rates.

4.10 IDE Interface


The primary IDE interface is a standard IDC socket connector with a spacing of 2 mm. All commercial IDE devices are supported but an adapter to connect may be necessary.

The required settings are made in the BIOS setup.



CAUTION

Pins are not keyed! Please be sure to connect the cable properly, otherwise you risk damaging the IDE interface, the CPU and the drive, voiding respective warranties.

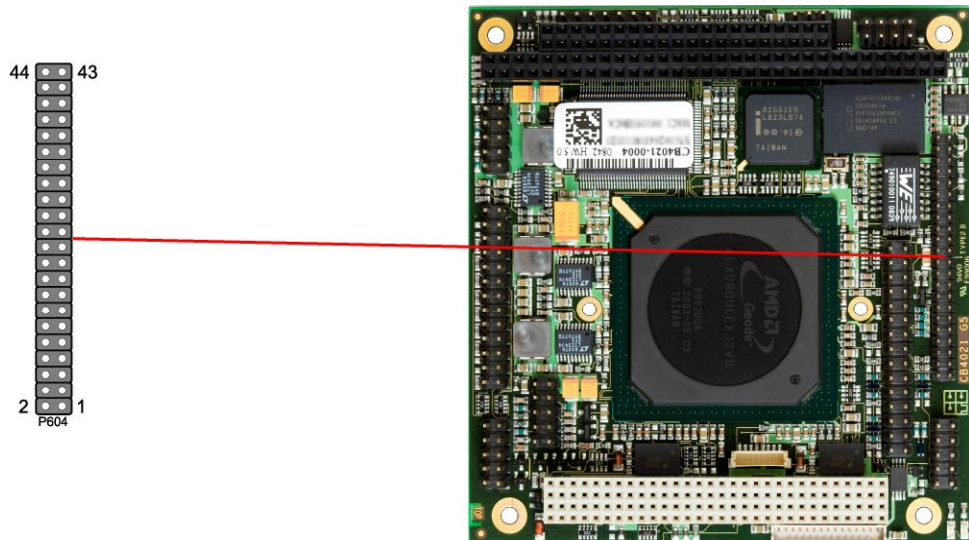


Pinout for primary IDE

Description	Name	Pin		Name	Description
reset	PRST#	1	2	GND	ground
data bit 7	PDD7	3	4	PDD8	data bit 8
data bit 6	PDD6	5	6	PDD9	data bit 9
data bit 5	PDD5	7	8	PDD10	data bit 10
data bit 4	PDD4	9	10	PDD11	data bit 11
data bit 3	PDD3	11	12	PDD12	data bit 12
data bit 2	PDD2	13	14	PDD13	data bit 13
data bit 1	PDD1	15	16	PDD14	data bit 14
data bit 0	PDD0	17	18	PDD15	data bit 15
ground	GND	19	20	N/C	reserved
DMA request signal	PDDREQ	21	22	GND	ground
write signal	PDIOW#	23	24	GND	ground
read signal	PDIOR#	25	26	GND	ground
ready signal	PDRDY	27	28	N/C	reserved
DMA acknowledge signal	PDDACK#	29	30	GND	ground
interrupt signal	PDIRQ	31	32	N/C	reserved
address bit 1	PDA1	33	34	PDMA66EN	enable UDMA66
address bit 0	PDA0	35	36	PDA2	address bit 2
chip select signal 0	PDSC0#	37	38	PDCS1#	chip select signal 1
reserved	N/C	39	40	GND	ground
supply HDD 5V	VCC	41	42	VCC	supply HDD 5V
ground	GND	43	44	N/C	reserved

4.11 Parallel Interface LPT

The parallel interface is a standard IDC socket connector with a spacing of 2.54 mm. The port address and the interrupt are set via the BIOS setup.

The parallel port may be selected in BIOS-setup to interface to a standard PC floppy drive, but a special cable is required for such operation. Please contact your sales representative for such a cable.

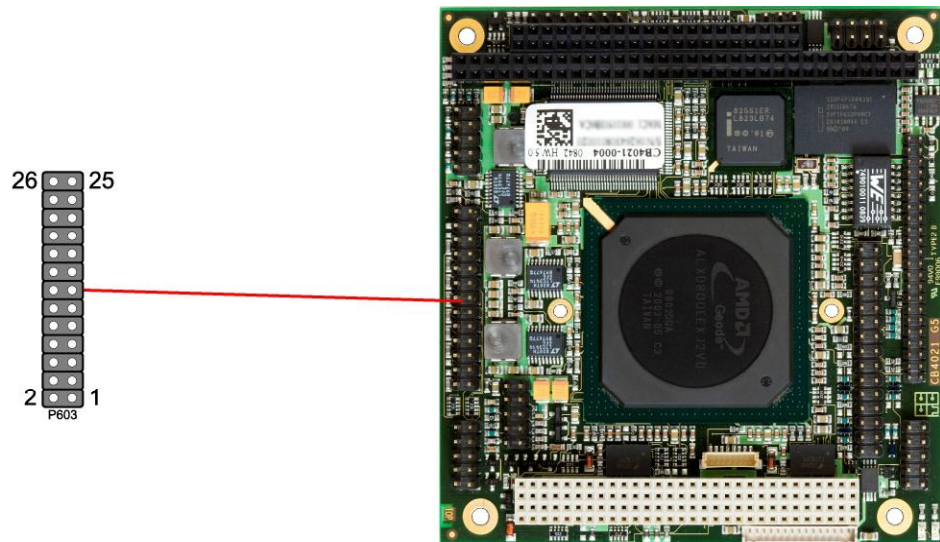

Pinout LPT interface (FDC signals in brackets):

Description	Name	Pin		Name	Description
strobe	STB#	1	2	AFD# (DRV DEN0)	automatic line feed (drive density 0)
LPT data 0 (Index)	PD0 (IDX#)	3	4	ERR# (HDSL#)	error (head select)
LPT data 1 (track 0)	PD1 (TR0#)	5	6	INIT# (DIR#)	init (direction)
LPT data 2 (write protect)	PD2 (WPRT#)	7	8	SLIN# (STP#)	select input (step)
LPT data 3 (read data)	PD3 (RDATA#)	9	10	GND	ground
LPT data 4 (disk change)	PD4 (DC#)	11	12	GND	ground
LPT data 5	PD5	13	14	GND	ground
LPT data 6 (motor 0)	PD6 (MT0#)	15	16	GND	ground
LPT data 7 (drive select 0)	PD7 (DR0#)	17	18	GND	ground
acknowledge (drive select 1)	ACK# (DR1#)	19	20	GND	ground
busy (motor 1)	BUSY (MT1#)	21	22	GND	ground
paper end (write data)	PE (WD#)	23	24	GND	ground
select printer (write enable)	SLCT (WG#)	25	26	VCC	5 volt supply

4.12 Serial Interface COM1


The serial interface is a standard IDC socket connector with a spacing of 2.54 mm. Signals default to RS-232 but can also be ordered as RS-422 or RS-485.

The port address and the interrupt are set via the BIOS setup.



CAUTION

COM 1 & 2 cables are not the same pin orientation and you may damage the COM interface and CPU attached if you use the incorrect COM cable.



Description	Name	Pin		Name	Description
data carrier detect	DCD	1	2	DSR	data set ready
receive data	RXD	3	4	RTS	request to send
transmit data	TXD	5	6	CTS	clear to send
data terminal ready	DTR	7	8	RI	ring indicator
ground	GND	9	10	VCC	5 volt supply

Pinout with RS422/485 soldering option:

Description	Name	Pin		Name	Description
transmit data +	TX	1	2	TX#	transmit data -
receive data +	RX	3	4	RX#	receive data -
reserved	N/C	5	6	N/C	reserved
reserved	N/C	7	8	N/C	reserved
ground	GND	9	10	VCC	5 volt supply

4.13 Serial Interface COM2



The serial interface is a standard IDC socket connector with a spacing of 2.54 mm. Signals default to RS-232 but can also be ordered as RS-422 or RS-485.

The port address and the interrupt are set via the BIOS setup.



CAUTION

COM 1 & 2 cables are not the same pin orientation and you may damage the COM interface and CPU attached if you use the incorrect COM cable.

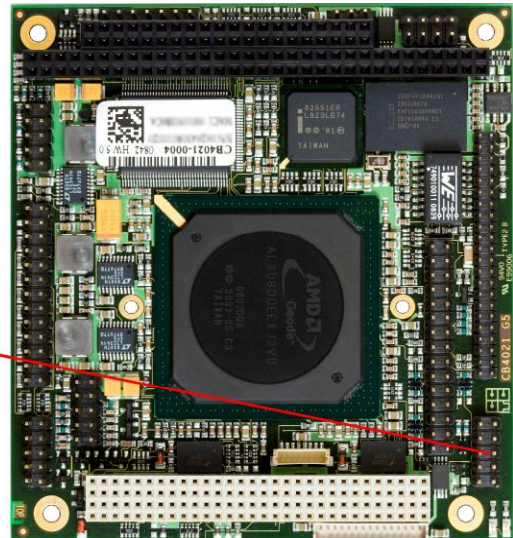


Description	Name	Pin		Name	Description
data carrier detect	DCD	1	2	DSR	data set ready
receive data	RXD	3	4	RTS	request to send
transmit data	TXD	5	6	CTS	clear to send
data terminal ready	DTR	7	8	RI	ring indicator
ground	GND	9	10	VCC	5 volt supply

Pinout with RS422/485 soldering option:

Description	Name	Pin		Name	Description
transmit data +	TX	1	2	TX#	transmit data -
receive data +	RX	3	4	RX#	receive data -
reserved	N/C	5	6	N/C	reserved
reserved	N/C	7	8	N/C	reserved
ground	GND	9	10	VCC	5 volt supply

4.14 SMBus


The CB4021 can communicate with external devices via the SMBus protocol. The signals for this protocol are available through a standard IDC socket connector with a spacing of 2.54 mm. A 3.3 volt power supply is also available for these SMBus devices. Additionally, you can use this connector to access the PWRBTN# and PS_ON# signals used for power control. If PWRBTN# is held low for four seconds an unconditional hardware power-down event will occur. In the off state S5 both SMBALRT# and PWRBTN# will generate a power-on event if asserted.

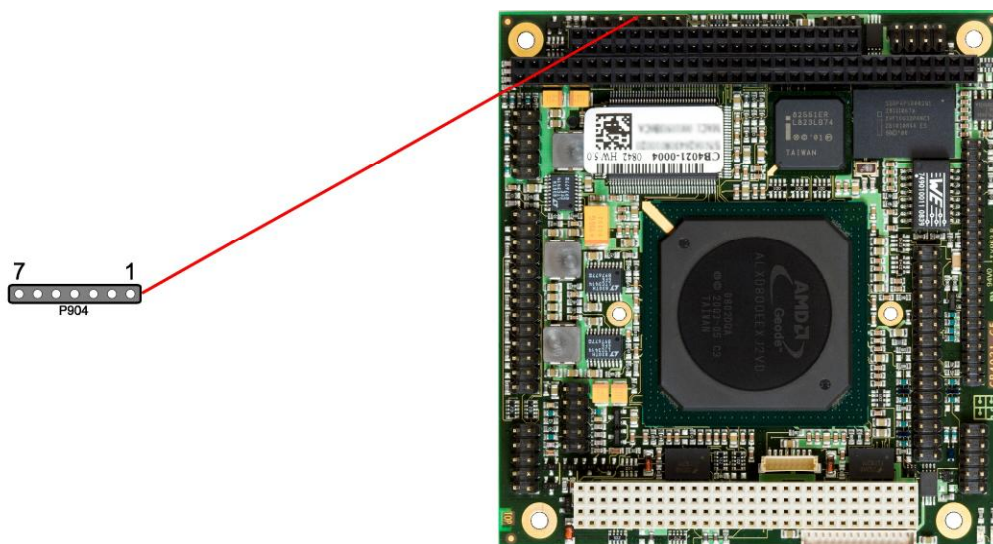

Pin	Name	Description
1	3.3V	3.3 volt supply
2	CS-SMB-CLK	SMBus clock
3	CS-SMB-DAT	SMBus data
4	SMB-ALERT#	SMBus alert
5	PWRBTN#	power button
6	PS_ON#	power supply on
7	GND	ground

4.15 Monitoring Functions


Some more monitoring functions, e. g. concerning the status of the fan or of other devices connected over SMBus (e. g. temperature sensor), are accessible via an 8 pin connector (JST BM08B-SRSS-TB, mating connector: SHR-08V-S(-B)).

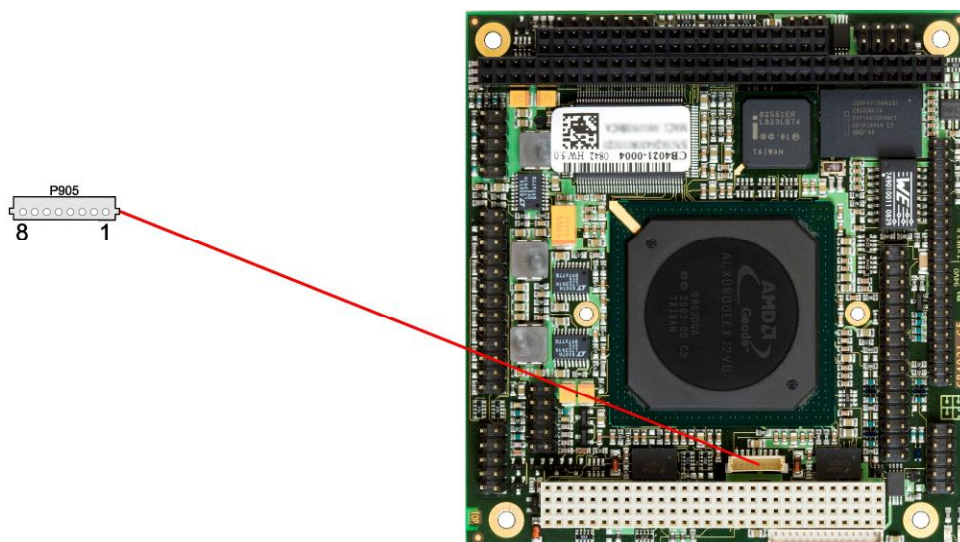

Pin	Name	Description
1	3.3V	3.3 volt supply
2	CS-SMB-CLK	SMBus clock
3	CS-SMB-DAT	SMBus data
4	GND	ground
5	FANON1	5 volt supply (switched)
6	FANCTRL1	fan 1 monitoring signal
7	VCC	5 volt supply
8	FANCTRL3	fan 3 monitoring signal

4.16 Fan

A 3 pin connector is available for controlling and monitoring an external fan (5 volt). For the monitoring the fan must provide a corresponding speed signal.

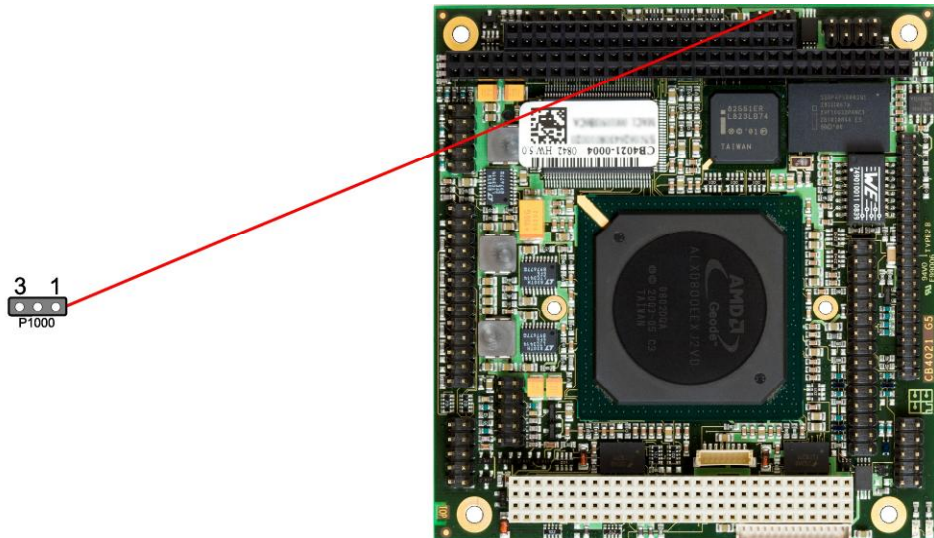

Pin	Name	Description
1	GND	ground
2	FANON2	5 volt supply (switched)
3	FANCTRL2	fan monitoring signal

5 BIOS Settings

5.1 Remarks for Setup Use

In a setup page, standard values for its setup entries can be loaded. Fail-safe defaults are loaded with F6 and optimized defaults are loaded with F7. These standard values are independent of the fact that a board has successfully booted with a setup setting before.

This is different if these defaults are called from the Top Menu. Once a setup setting was saved, which subsequently leads to a successful boot process, those values are loaded as default for all setup items afterwards.

See also the chapters “Load Fail-Safe Defaults” (5.10) and “Load Optimized Defaults” (5.11).



NOTE

BIOS features and setup options are subject to change without further notice. The settings displayed in the screenshots on the following pages are meant to be examples only. Neither do they represent the recommended settings nor the default settings. What the appropriate settings are depends entirely on the particular application scenario in which the board is used.

5.2 Top Level Menu

Phoenix – AwardBIOS CMOS Setup Utility	
▶ Standard CMOS Features ▶ Advanced BIOS Features ▶ Advanced Chipset Features ▶ Integrated Peripherals ▶ Power Management Setup ▶ PnP/PCI Configurations	▶ PC Health Status - Load Fail-Safe Defaults - Load Optimized Defaults - Set Password - Save & Exit Setup - Exit Without Saving
Esc : Quit	↑ ↓ → ← : Select Item
F10 : Save & Exit Setup	
"brief description of selected item"	

The sign „▶“ in front of an item means that there is a sub menu.

The „X“ sign in front of an item means, that the item is disabled but can be enabled by changing or selecting some other item (usually somewhere above the disabled item on the same screen).

Use the arrow buttons to navigate from one item to another. For selecting an item press Enter which will open either a sub menu or a dialog screen.

5.3 Standard CMOS Features

Phoenix - AwardBIOS CMOS Setup Utility Standard CMOS Features		
Date (mm:dd:yy)	Thu, Jan 25 2007	Item Help
Time (hh:mm:ss)	11 : 13 : 35	
► IDE Primary Master	[None]	
► IDE Primary Slave	[None]	
Drive A	[None]	
Base Memory	640K	
Extended Memory	514816K	
Total Memory	515584K	
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:Help F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults		

ü Date (mm:dd:yy)

Options: mm: month
dd: day
yy: year

ü Time (hh:mm:ss)

Options: hh: hours
mm: minutes
ss: seconds

ü IDE Primary Master

Sub menu: see "IDE Primary Master/Slave" (p. 37)

ü IDE Primary Slave

Sub menu: see "IDE Primary Master/Slave" (p. 37)

ü Drive A

Options: None / 360K, 5.25 in. / 1.2M, 5.25 in. / 720K, 3.5 in. / 1.44M, 3.5 in. / 2.88M, 3.5 in.

ü Base Memory

Options: none

ü Extended Memory

Options: none

ü Total Memory

Options: none

5.3.1 IDE Primary Master/Slave

Phoenix – AwardBIOS CMOS Setup Utility
IDE Primary Master

IDE HDD Auto-Detection	[Press Enter]	Item Help
IDE Primary Master	[Auto]	
Access Mode	[Auto]	
Capacity	0 MB	
Cylinder	0	
Head	0	
Precomp	0	
Landing Zone	0	
Sector	0	

↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:Help
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

ü IDE HDD Auto-Detection

Options: none

ü IDE Primary Master

Options: None / Auto / Manual

ü Access Mode

Options: CHS / LBA / Large / Auto

ü Capacity

Options: none

ü Cylinder

Options: none

ü Head

Options: none

ü Precomp

Options: none

ü Landing Zone

Options: none

ü Sector

Options: none



NOTE

The onboard SSD can be disabled by selecting "None" in the relevant "IDE Primary Master" or "IDE Primary Slave" dialogue. Note that even when the SSD is disabled it still occupies it's Master or Slave line so that you can't connect another device there.

5.4 Advanced BIOS Features

Phoenix - AwardBIOS CMOS Setup Utility			
Advanced BIOS Features			
▶ Hard Disk Boot Priority	[Press Enter]	Item Help	
Anti-Virus Protection	[Disabled]		
CPU Internal Cache	[Enabled]		
Quick Power On Self Test	[Enabled]		
First Boot Device	[HDD-0]		
Second Boot Device	[Disabled]		
Third Boot Device	[Disabled]		
Boot Other Device	[Enabled]		
Boot Up Floppy Seek	[Disabled]		
Boot Up NumLock Status	[On]		
Gate A20 Option	[Fast]		
Typematic Rate Setting	[Disabled]		
x Typematic Rate (Chars/Sec)	6		
x Typematic Delay (Msec)	250		
Security Option	[Setup]		
OS Select For DRAM > 64MB	[Non-OS2]		
Full Screen LOGO Show	[Enabled]		
Summary Screen Show	[Disabled]		
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:Help			
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults			

ü Hard Disk Boot Priority

Sub menu: see "Hard Disk Boot Priority" (p. 40)

ü Anti-Virus Protection

Options: Enabled / Disabled

ü CPU Internal Cache

Options: Enabled / Disabled

ü Quick Power On Self Test

Options: Enabled / Disabled

ü First Boot Device

Options: Floppy / LS120 / Hard Disk / CDROM / ZIP100 / USB-FDD / USB-ZIP / USB-CDROM /
Legacy LAN / Disabled

ü Second Boot Device

Options: Floppy / LS120 / Hard Disk / CDROM / ZIP100 / USB-FDD / USB-ZIP / USB-CDROM /
Legacy LAN / Disabled

ü Third Boot Device

Options: Floppy / LS120 / Hard Disk / CDROM / ZIP100 / USB-FDD / USB-ZIP / USB-CDROM /
Legacy LAN / Disabled

ü Boot Other Device

Options: Enabled / Disabled

ü Boot Up Floppy Seek

Options: Enabled / Disabled

ü Boot Up NumLock Status

Options: Off / On

ü Gate A20 Option

Options: Normal / Fast

ü Typematic Rate Setting

Options: Enabled / Disabled

ü Typematic Rate (Chars/Sec)

Options: 6 / 8 / 10 / 12 / 15 / 20 / 24 / 30

ü Typematic Delay (Msec)

Options: 250 / 500 / 750 / 1000

ü Security Option

Options: Setup / System

ü OS Select For DRAM > 64MB

Options: Non-OS2 / OS2


ü Full Screen LOGO Show

Options: Enabled / Disabled

ü Summary Screen Show

Options: Enabled / Disabled

5.4.1 Hard Disk Boot Priority

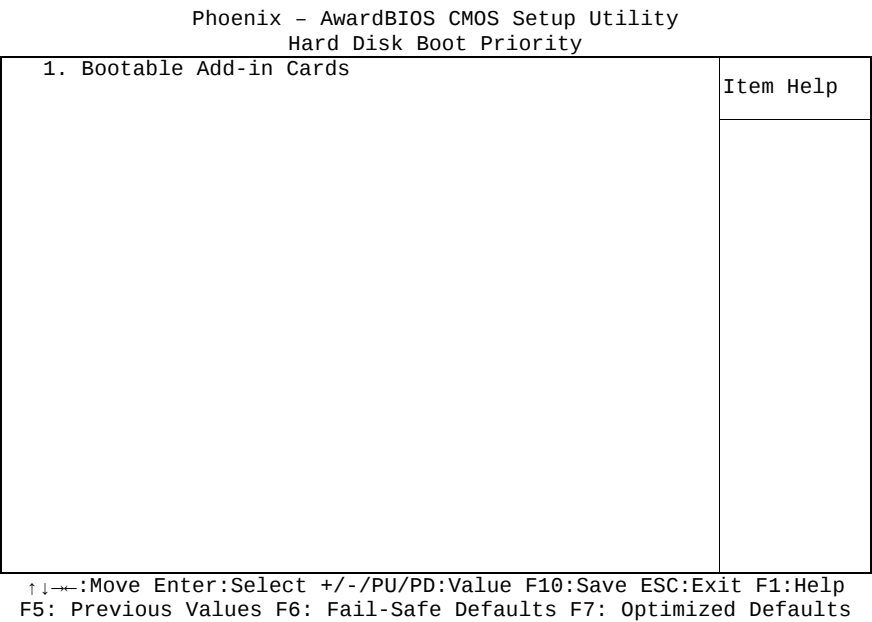

ü [list of available devices]

Options: this dialog allows you to set the order in which the available bootable devices shall be accessed for an attempt to boot.

ü Attention!

in this sub menu the buttons <Page Up>, <Page Down>, <+> and <-> have a different function than in the rest of the setup: They serve to move the items of the list up or down.

5.5 Advanced Chipset Features

Phoenix - AwardBIOS CMOS Setup Utility			
Advanced Chipset Features			
CPU Frequency	[Auto]	Item Help	
x Memory Frequency	Auto		
CAS Latency	[Auto]		
Interleave Select	[LOI]		
Video Memory Size	[8 M]		
Output Display	[CRT]		
x Flat Panel Configuration	Press Enter		
x TV Output Configuration	Press Enter		
Onboard Audio	[Enabled]		
Onboard USB1.1	[Enabled]		
Onboard USB2.0	[Enabled]		
Onboard IDE	[Enabled]		
Onboard LAN Controller	[Enabled]		
Overcurrent reporting	[Disabled]		
Port 4 assignment	[Host]		
Memory Hole At 15M-16M	[Disabled]		
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:Help F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults			

ü CPU Frequency

Options: Auto / 200 MHz / 333 MHz / 400 MHz / 433 MHz / 500 MHz / 600 MHz

ü Memory Frequency

Options: Auto / 100 MHz / 133 MHz / 166 MHz / 200 MHz

ü CAS Latency

Options: Auto / 1.5 / 2.0 / 2.5 / 3.0 / 3.5

ü Interleave Select

Options: HOI / LOI

ü Video Memory Size

Options: Disable / 8 M / 16 M / 32 M / 64 M / 128 M / 254 M

ü Output Display

Options: Flat Panel / TV Output / CRT / Panel & CRT

ü Flat Panel Configuration

Sub menu: see "PC Health Status" (p. 43)

ü TV Output Configuration

Sub menu: see "TV Output Configuration" (p. 44)

ü Onboard Audio

Options: Enabled / Disabled

ü Onboard USB1.1

Options: Enabled / Disabled

ü Onboard USB2.0

Options: Enabled / Disabled

ü Onboard IDE

Options: Enabled / Disabled

ü **Onboard LAN-Controller**

Options: Enabled / Disabled

ü **Overcurrent Reporting**

Options: Enabled / Disabled

ü **Port 4 Assignment**

Options: Host / Device / Not Used

ü **Memory Hole At 15M-16M**

Options: Enabled / Disabled

5.5.1 PC Health Status

Phoenix - AwardBIOS CMOS Setup Utility		
Flat Panel Configuration		
Flat Panel Type	[Auto]	Item Help
x Resolution	800 x 600	
x Data Bus Type	9-24 bits, 1 ppc	
x Refresh Rate	60 Hz	
x HSYNC Polarity	Normal low	
x VSYNC Polarity Active	Normal low	
SHFCLK Active Period	[Free Running]	
LP Active Period	[Free Running]	

↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:Help
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

ü Flat Panel Type

Options: TFT / LVDS / Auto

ü Resolution

Options: 320 x 240 / 640 x 480 / 800 x 600 / 1024 x 768 / 1152 x 864 / 1280 x 1024 / 1600 x 1200

ü Data Bus Type

Options: 9-24 bits, 1 ppc / 18,24 bits, 2 ppc

ü Refresh Rate

Options: 60 Hz / 70 Hz / 72 Hz / 75 Hz / 85 Hz / 90 Hz / 100 Hz

ü HSYNC Polarity

Options: Normal high / Normal low

ü VSYNC Polarity Active

Options: Normal high / Normal low

ü SHFCLK Active Period

Options: Active only / Free running

ü LP Active Period

Options: Active only / Free running

5.5.2 TV Output Configuration

Phoenix - AwardBIOS CMOS Setup Utility

TV Output Configuration

TV Encoder	[VT1622]	Item Help
x TV Standard	NTSC	
x TV Resolution	Low	

↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:Help
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

- ü **TV Encoder**
Options: ADV7171 / SAA7127 / ADV7301 / FS 454 / VT1622 / Auto
- ü **TV Standard**
Options: NTSC / PAL / HDTV
- ü **TV Resolution**
Options: Low / Medium / High

5.6 Integrated Peripherals

Phoenix - AwardBIOS CMOS Setup Utility Integrated Peripherals

On-Chip IDE Channel 1	[Enabled]	Item Help
Master Drive PIO Mode	[Auto]	
Slave Drive PIO Mode	[Auto]	
IDE Primary Master UDMA	[Auto]	
IDE Primary Slave UDMA	[Auto]	
IDE DMA transfer access	[Enabled]	
IDE HDD Block Mode	[Enabled]	
Onboard FDC Controller	[Enabled]	
Onboard Serial Port 1	[3F8/IRQ4]	
Onboard Serial Port 2	[2F8/IRQ3]	
UART Mode Select	[Normal]	
x RxD , TxD Active	Hi,Lo	
x IR Transmission Delay	Enabled	
x UR2 Duplex Mode	Half	
x Use IR Pins	IR-Rx2Tx2	
Onboard Parallel Port	[378/IRQ7]	
Parallel Port Mode	[SPP]	
x EPP Mode Select	EPP1.9	
x ECP Mode Use DMA	3	

↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:Help
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

ü On-Chip IDE Channel 1

Options: Enabled / Disabled

ü Master Drive PIO Mode

Options: Auto / Mode 0 / Mode 1 / Mode 2 / Mode 3 / Mode 4

ü Slave Drive PIO Mode

Options: Auto / Mode 0 / Mode 1 / Mode 2 / Mode 3 / Mode 4

ü IDE Primary Master UDMA

Options: Disabled / Auto

ü IDE Primary Slave UDMA

Options: Disabled / Auto

ü IDE DMA transfer access

Options: Enabled / Disabled

ü IDE HDD Block Mode

Options: Enabled / Disabled

ü Onboard FDC Controller

Options: Enabled / Disabled

ü Onboard Serial Port 1

Options: Disabled / 3F8/IRQ4 / 2F8/IRQ3 / 3E8/IRQ4 / 2E8/IRQ3 / Auto

ü Onboard Serial Port 2

Options: Disabled / 3F8/IRQ4 / 2F8/IRQ3 / 3E8/IRQ4 / 2E8/IRQ3 / Auto

ü UART Mode Select

Options: IrDA / ASKIR / Normal

ü RxD , TxD Active

Options: Hi,Hi / Hi,Lo / Lo,Hi / Lo,Lo

ü IR Transmission Delay

Options: Enabled / Disabled

ü UR2 Duplex Mode

Options: Full / Half

ü Use IR Pins

Options: RxD2,TxD2 / IR-Rx2Tx2

ü Onboard Parallel Port

Options: Disabled / 378/IRQ7 / 278/IRQ5 / 3BC/IRQ7

ü Parallel Port Mode

Options: SPP / EPP / ECP / ECP+EPP / Normal

ü EPP Mode Select

Options: EPP1.9 / EPP1.7

ü ECP Mode Use DMA

Options: 1 / 3

5.7 Power Management Setup

Phoenix - AwardBIOS CMOS Setup Utility			
Power Management Setup			
x ACPI Function	[Enabled]	Item Help	
ACPI Suspend Type	[S1&S3]		
Power Management	[ACPI]		
** PM Timers **			
x Standby Mode	Disabled		
x Suspend Mode	Disabled		
MODEM Use IRQ	[N/A]		
PME Event Function	[Enabled]		
Soft-Off by PWR-BTTN	[Instant-Off]		
Power-On by Alarm	[Disabled]		
x Time(hh:mm:ss) Alarm	0		
x	0		
x	0		
► IRQ Wakeup Events	[Press Enter]		
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:Help			
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults			

ü ACPI function

Options: none

ü ACPI Suspend Type

Options: S1(POS) / S3(STR) / S1&S3

ü Power Management

Options: Disabled / Legacy / APM / ACPI

ü Standby Mode

Options: Disabled / 1 Sec / 5 Sec / 10 Sec / 15 Sec / 30 Sec / 45 Sec / 1 Min / 5 Min / 10 Min / 15 Min / 30 Min / 45 Min / 60 Min / 90 Min / 120 Min

ü Suspend Mode

Options: Disabled / 1 Sec / 5 Sec / 10 Sec / 15 Sec / 30 Sec / 45 Sec / 1 Min / 5 Min / 10 Min / 15 Min / 30 Min / 45 Min / 60 Min / 90 Min / 120 Min

ü MODEM Use IRQ

Options: NA / 3 / 4 / 5 / 7 / 9 / 10 / 11

ü PME Event Function

Options: Enabled / Disabled

ü Soft-Off by PWR-BTTN

Options: Instant-Off / Delay 4 Sec

ü Power-On by Alarm

Options: Enabled / Disabled

ü Time (hh:mm:ss) Alarm

Options: insert [hh], [mm] and [ss]

ü IRQ Wakeup Events

Sub menu: see "IRQ Wakeup Events" (p. 48)

5.7.1 IRQ Wakeup Events

Phoenix – AwardBIOS CMOS Setup Utility

IRQ Wakeup Events :

IRQ1 (KeyBoard)	[ON]	Item Help
IRQ3 (COM 2)	[OFF]	
IRQ4 (COM 1)	[OFF]	
IRQ5 (LPT 2)	[OFF]	
IRQ6 (Floppy Disk)	[OFF]	
IRQ7 (LPT 1)	[OFF]	
IRQ8 (RTC Alarm)	[OFF]	
IRQ9 (IRQ2 Redir)	[OFF]	
IRQ10 (Reserved)	[OFF]	
IRQ11 (Reserved)	[OFF]	
IRQ12 (PS/2 Mouse)	[OFF]	
IRQ13 (Coprocessor)	[OFF]	
IRQ14 (Hard Disk)	[OFF]	
IRQ15 (Reserved)	[OFF]	

↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:Help
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

ü **IRQ1 (KeyBoard)**
Options: Off / On

ü **IRQ3 (COM 2)**
Options: Off / On

ü **IRQ4 (COM 1)**
Options: Off / On

ü **IRQ5 (LPT 2)**
Options: Off / On

ü **IRQ6 (Floppy Disk)**
Options: Off / On

ü **IRQ7 (LPT 1)**
Options: Off / On

ü **IRQ8 (RTC Alarm)**
Options: Off / On

ü **IRQ9 (IRQ2 Redir)**
Options: Off / On

ü **IRQ10 (Reserved)**
Options: Off / On

ü **IRQ11 (Reserved)**
Options: Off / On

ü **IRQ12 (PS/2 Mouse)**
Options: Off / On

ü **IRQ13 (Coprocessor)**
Options: Off / On

ü **IRQ14 (Hard Disk)**

Options: Off / On

ü **IRQ15 (Reserved)**

Options: Off / On

5.8 PnP/PCI Configuration

Phoenix - AwardBIOS CMOS Setup Utility
PnP/PCI Configurations

Init Display First	[PCI Slot]	Item Help
Reset Configuration Data	[Disabled]	
Resources Controlled By	[Auto(ESCD)]	
x IRQ Resources	[Press Enter]	
x Memory Resources	[Press Enter]	
PCI/VGA Palette Snoop	[Disabled]	

↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:Help
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

ü Init Display First

Options: PCI Slot / Onboard

ü Reset Configuration Data

Options: Enabled / Disabled

ü Resources Controlled By

Options: Auto(ESCD) / Manual

ü IRQ Resources

Sub menu: see "IRQ Resources" (p. 51)

ü Memory Resources

Sub menu: see "Memory Resources" (p. 52)

ü PCI/VGA Palette Snoop

Options: Enabled / Disabled

5.8.1 IRQ Resources

Phoenix - AwardBIOS CMOS Setup Utility

IRQ Resources

IRQ-3 assigned to	[PCI Device]	Item Help
IRQ-4 assigned to	[PCI Device]	
IRQ-5 assigned to	[PCI Device]	
IRQ-7 assigned to	[PCI Device]	
IRQ-10 assigned to	[PCI Device]	
IRQ-11 assigned to	[PCI Device]	
IRQ-15 assigned to	[PCI Device]	

↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:Help
 F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

ü IRQ-3 assigned to

Options: PCI Device / Reserved

ü IRQ-4 assigned to

Options: PCI Device / Reserved

ü IRQ-5 assigned to

Options: PCI Device / Reserved

ü IRQ-7 assigned to

Options: PCI Device / Reserved

ü IRQ-10 assigned to

Options: PCI Device / Reserved

ü IRQ-11 assigned to

Options: PCI Device / Reserved

ü IRQ-15 assigned to

Options: PCI Device / Reserved

5.8.2 Memory Resources

Phoenix - AwardBIOS CMOS Setup Utility		
Memory Resources		
Reserved Memory Base	[N/A]	Item Help
x Reserved Memory Length	8K	

ü Reserved Memory Base

Options: N/A / C800 / CC00 / D000 / D400 / D800 / DC00

ü Reserved Memory Length

Options: 8K / 16K / 32K / 64K

5.9 PC Health Status

Phoenix - AwardBIOS CMOS Setup Utility		
PC Health Status		
Shutdown Temperature	[70°C/158°F]	Item Help
Temp. Board	51°C	
Temp. CPU	49°C	
CPU Core	1.24V	
CPU VTT	1.28V	
+2.5 V	2.54V	
+3.3 V	3.40V	
+5.0 V	5.04V	
Fan1 Speed	5400 RPM	
Fan2 Speed	0 RPM	
Fan3 Speed	0 RPM	

↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:Help
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

ü Shutdown Temperature

Options: 60°C/140°F / 65°C/149°F / 70°C/158°C / Disabled

ü Temp. Board

Options: none

ü Temp. CPU

Options: none

ü CPU Core

Options: none

ü CPU VTT

Options: none

ü +2.5 V

Options: none

ü +3.3 V

Options: none

ü +5.0 V

Options: none

ü Fan1 Speed

Options: none

ü Fan2 Speed

Options: none

ü Fan3 Speed

Options: none

5.10 Load Fail-Safe Defaults

If this option is chosen, the last working setup is loaded from flash. Working means that the setup setting has already led to a successful boot process.

At the first setting of the BIOS setup, safe values are loaded which lets the board boot. This status is reached again, if the board is reprogrammed with the corresponding flash-program and the required parameters.

5.11 Load Optimized Defaults

This option applies like described under "Remarks for Setup Use" (5.1).

At first start of the BIOS, optimized values are loaded from the setup, which are supposed to make the board boot. This status is achieved again, if the board is reprogrammed using the flash program with the required parameters.

5.12 Set Password

Here you can enter a password to protect the BIOS settings against unauthorized changes. Use this option with care! Forgotten or lost passwords are a frequent problem.

5.13 Save & Exit Setup

Settings are saved and the board is restarted.

5.14 Exit Without Saving

This option leaves the setup without saving any changes.

6 BIOS update

If a BIOS update becomes necessary, the program "AWDFLASH.EXE" of the company Phoenix is used for this. It is important, that the program is started from a DOS environment without a virtual memory manager such as for example "EMM386.EXE". In case such a memory manager is loaded, the program will stop with an error message.

The system must not be interrupted during the flash process, otherwise the update is stopped and the BIOS is destroyed afterwards.

The program should be started as follows:

```
awdflash [biosfilename] /sn /cc /cd /cp
```

/sn	Do not save the current BIOS
/cc	Clear the CMOS
/cd	Clear the DMI information
/cp	Clear the PnP information

The erasure of CMOS, DMI and PnP is strongly recommended. This ensures, that the new BIOS works correctly and that all chipset registers, which were saved in the setup, are reinitialized through the BIOS. A complete description of all valid parameters is shown with the parameter "/?".

In order to make the updating process run automatically, the parameter "/py" must be added. This parameter bypasses all security checks during programming.



CAUTION

Updating the BIOS in an improper way can render the board unusable. Therefore, you should only update the BIOS if you really need the changes/corrections which come with the new BIOS version.



CAUTION

Before you proceed to update the BIOS you need to make absolutely sure that you have the right BIOS file which was issued for the exact board and exact board revision that you wish to update. If you try to update the BIOS using the wrong file the board will not start up again.


7 Mechanical Drawing

7.1 PCB: Mounting Holes



NOTE

All dimensions are in mil.

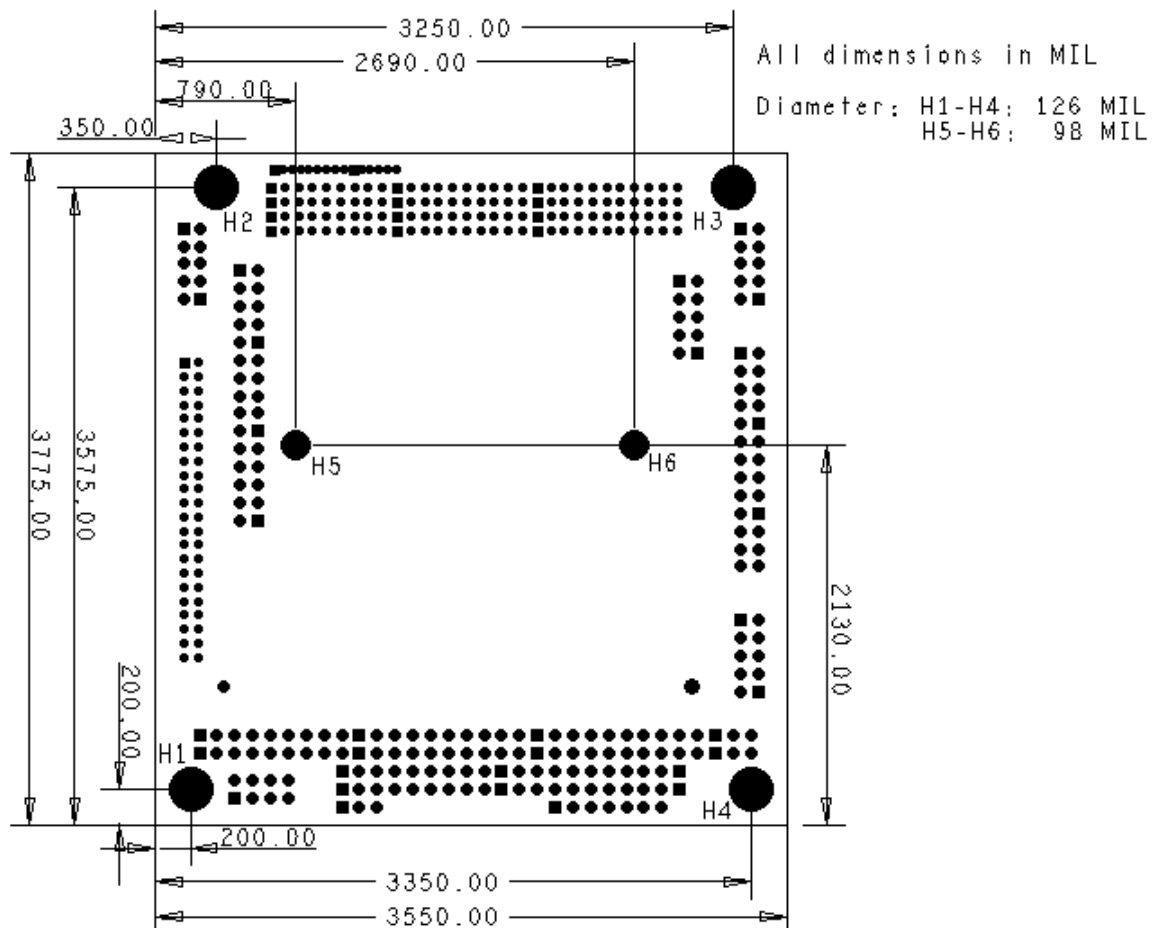


7.2 PCB: Pin 1 Dimensions



NOTE

All dimensions are in mil.

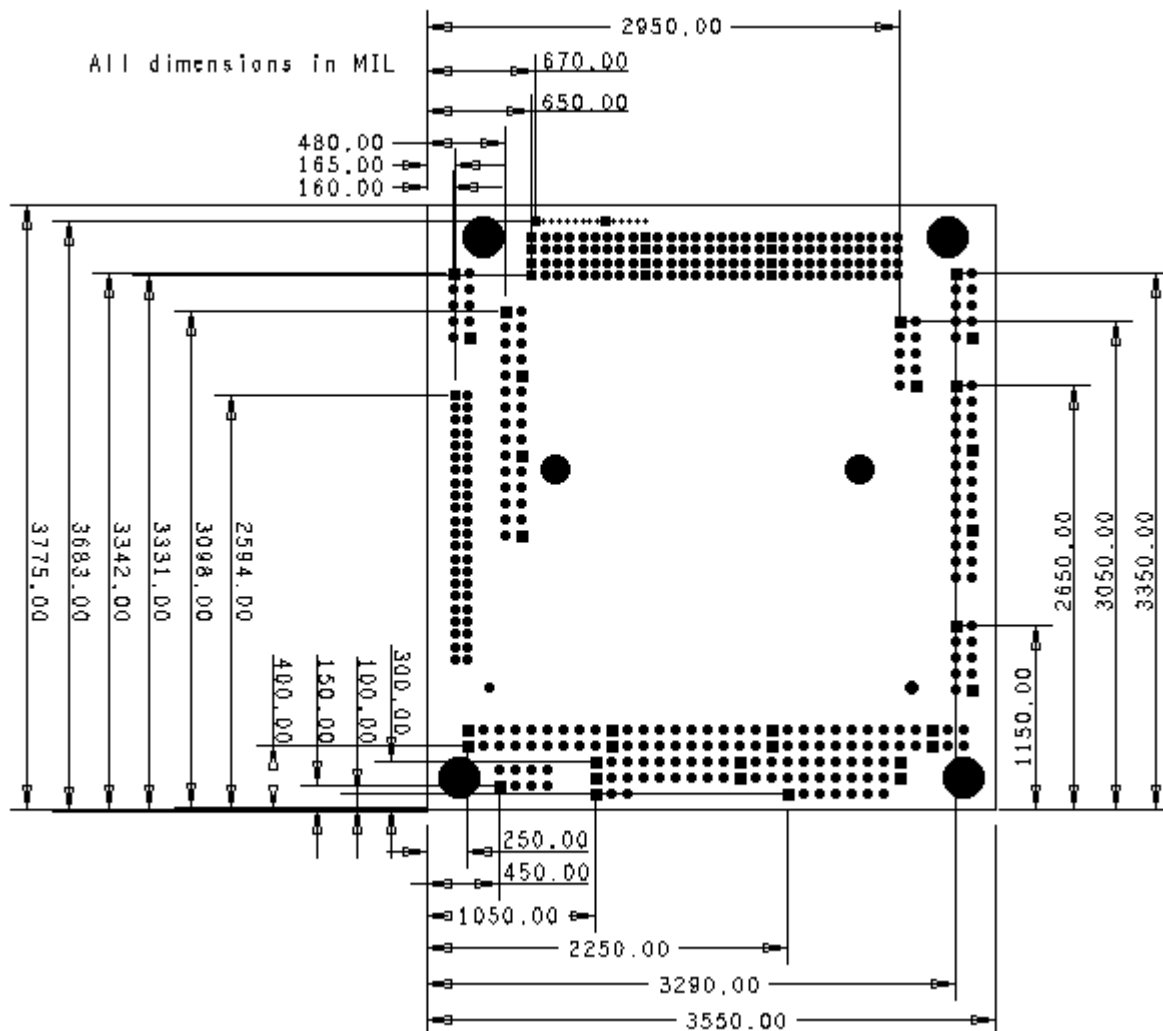

8 Technical Data

8.1 Electrical Data

Power Supply:

Board:	5 Volt +/- 5%
RTC:	>= 3 Volt

Electric Power Consumption:

Board:	1,27A idle, 1,56A full (LX800, 2GB SSD, 25°C)
RTC:	<= 10μA

8.2 Environmental Conditions

Temperature Range:

Operating:	0°C to +60°C (extended temperature on request)
Storage:	-25°C up to +85°C
Shipping:	-25°C up to +85°C, for packaged boards

Temperature Changes:

Operating:	0.5°C per minute, 7.5°C per 30 minutes
Storage:	1.0°C per minute
Shipping:	1.0°C per minute, for packaged boards

Relative Humidity:

Operating:	5% up to 85% (non condensing)
Storage:	5% up to 95% (non condensing)
Shipping:	5% up to 100% (non condensing), for packaged boards

Shock:

Operating:	150m/s ² , 6ms
Storage:	400m/s ² , 6ms
Shipping:	400m/s ² , 6ms, for packaged boards

Vibration:

Operating:	10 up to 58Hz, 0.075mm amplitude 58 up to 500Hz, 10m/s ²
Storage:	5 up to 9Hz, 3.5mm amplitude 9 up to 500Hz, 10m/s ²
Shipping:	5 up to 9Hz, 3.5mm amplitude 9 up to 500Hz, 10m/s ² , for packaged boards



CAUTION

Shock and vibration figures pertain to the motherboard alone and do not include additional components such as heat sinks, memory modules, cables etc.

8.3 Thermal Specifications

The board is specified to operate in an environmental temperature range from 0°C to +60°C (extended temperature on request). Maximum die temperature is 100°C. To keep the processor under this threshold an appropriate cooling solution needs to be applied. This solution has to take typical and maximum power consumption into account. The maximum power consumption may be twice as high and should be used as a basis for the cooling concept. Additional controllers may also affect the cooling concept. The power consumption of such components may be comparable to the consumption of the processor.

The board design includes thermal solution mounting points that will provide the best possible thermal interface between die and solution. Since we take thermal solutions seriously we have several advanced, aggressive cooling solutions in our product portfolio. Please contact your sales representative to order or discuss your thermal solution needs.



CAUTION

The end customer has the responsibility to ensure that the die temperature of the processor does not exceed 100°C. Permanent overheating may destroy the board!

In case the temperature exceeds 100°C the environmental temperature must be reduced. Under certain circumstances sufficient air circulation must be provided.

9 Support and Service

Beckhoff and their partners around the world offer comprehensive support and service, making available fast and competent assistance with all questions related to Beckhoff products and system solutions.

9.1 Beckhoff's Branch Offices and Representatives

Please contact your Beckhoff branch office or representative for local support and service on Beckhoff products.

The addresses of Beckhoff's branch offices and representatives around the world can be found on her internet pages: <http://www.beckhoff.com>

You will also find further documentation for Beckhoff components there.

9.2 Beckhoff Headquarters

Beckhoff Automation GmbH
Eiserstr. 5
33415 Verl
Germany

phone: +49(0)5246/963-0
fax: +49(0)5246/963-198
e-mail: info@beckhoff.com
web: www.beckhoff.com

9.2.1 Beckhoff Support

Support offers you comprehensive technical assistance, helping you not only with the application of individual Beckhoff products, but also with other, wide-ranging services:

- o support
- o design, programming and commissioning of complex automation systems
- o and extensive training programs for Beckhoff system components

hotline: +49(0)5246/963-157
fax: +49(0)5246/963-9157
e-mail: support@beckhoff.com

9.2.2 Beckhoff Service

The Beckhoff Service Center supports you in all matters of after-sales service:

- o on-site service
- o repair service
- o spare parts service
- o hotline service

hotline: +49(0)5246/963-460
fax: +49(0)5246/963-479
e-mail: service@beckhoff.com

I Annex: Post-Codes

Code	Description
01h	The Xgroup-program code is written in the random access memory from address 1000:0 onwards.
03h	Initialise Variable/Routine "Superio_Early_Init".
05h	1. Cancel display 2. Cancel CMOS error flag
07h	1. Cancel 8042 (keyboard controller) Interface Register 2. Initialising and self testing of 8042 (keyboard controller)
08h	1. Test of special keyboard controllers (Winbond 977 super I/O Chip-series). 2. Enabling of the keyboard-interface register
0Ah	1. Disabling of the PS/2 mouse interface (optional). 2. Auto-detection of the connectors for Keyboard and mouse, optional: swap of PS/2 mouse ports and PS/2 interfaces.
0Eh	Test of the F000h-memory segment (Read/Write ability). In case of an error a signal will come out of the loud speakers.
10h	Auto-detection of the flash-rom-type and loading of the suitable Read/Write program into the run time memory segment F000 (it is required for ESCD-data & the DMI-pool-support).
12h	Interface-test of the CMOS RAM-logic (walking 1's"-algorithm). Setting of the power status of the real-time-clock (RTC), afterwards test of register overflow.
14h	Initialising of the chip-set with default values. They can be modified through a software (MODBIN) by the OEM-customer.
16h	Initialise Variable/Routine "Early_Init_Onboard_Generator".
18h	CPU auto-detection (manufacturer, SMI type (Cyrix or Intel), CPU-class (586 or 686).
1Bh	Initialising if the interrupt pointer table. If nothing else is pretended, the hardware interrupts will point on "SPURIOUS_INT_HDLR and the software interrupts will point on SPURIOUS_soft_HDLR.
1Dh	Initialise Variable/Routine EARLY_PM_INIT.
1Fh	Load the keyboard table (Notebooks)
21h	Initialising of the hardware power management (HPM) (Notebooks)
23h	1. Test the validity of the RTC-values (Example: "5Ah" is an invalid value for an RTC-minute). 2. Load the CMOS-values into the BIOS Stack. Default-values are loaded if CMOS-checksum errors occur. 3. Preparing of the BIOS 'resource map' for the PCI & plug and play configuration. If ESCD is valid, take into consideration the ESCD's legacy information. 4. Initialise the onboard clock generator. Clock circuit at non-used PCI- and DIMM slots. 5. First initialising of PCI-devices: assign PCI-bus numbers - alot memory- & I/O resources - search for functional VGA-controllers and VGA-BIOS and copy the latter into memory segment C000:0 (Video ROM Shadow).
27h	Initialise cache memory for INT 09
29h	1. Program the CPU (internal MTRR at P6 and PII) for the first memory address range (0-640K). 2. Initialising of the APIC at CPUs of the Pentium-class. 3. Program the chip-set according to the settings of the CMOS-set-up (Example: Onboard IDE-controller). 4. Measuring of the CPU clock speed. 5. Initialise the video BIOS.
2Dh	1. Initialise the "Multi-Language"-function of the BIOS 2. Soft copy, e.g. Award-Logo, CPU-type and CPU clock speed...
33h	Keyboard-reset (except super I/O chips of the Winbond 977 series)
3Ch	Test the 8254 (timer device)
3Eh	Test the interrupt Mask bits of IRQ-channel 1 of the interrupt controller 8259.
40h	Test the interrupt Mask bits of IRQ-channel 2 of the interrupt controller 8259
43h	Testing the function of the interrupt controller (8259).
47h	Initialise EISA slot (if existent).

Code	Description
49h	1. Determination of the entire memory size by revising the last 32-Bit double word of each 64k memory segment. 2. Program "write allocation" at AMD K5-CPU's.
4Eh	1. Program MTRR at M1 CPU's 2. Initialise level 2-cache at CPU's of the class P6 and set the "cacheable range" of the random access memory. 3. Initialise APIC at CPU's of the class P6. 4. Only for multiprocessor systems (MP platform): Setting of the "cacheable range" on the respective smallest value (for the case of non-identical values).
50h	Initialise USB interface
52h	Testing of the entire random access memory and deleting of the extended memory (put on "0")
55h	Only for multi processor systems (MP platform): Indicate the number of CPU's.
57h	1. Indicate the plug and play logo 2. First ISA plug and play initialising – CSN-assignment for each identified ISA plug and play device.
59h	Initialise TrendMicro anti virus program code.
5Bh	(Optional:) Indication of the possibility to start AWDFLASH.EXE (Flash ROM programming) from the hard disk.
5Dh	1. Initialise Variable/Routine Init_Onboard_Super_IO. 2. Initialise Variable/Routine Init_Onboard_AUDIO.
60h	Release for starting the CMOS set-up (this means that before this step of POST, users are not able to access the BIOS set-up).
65h	Initialising of the PS/2 mouse.
67h	Information concerning the size of random access memory for function call (INT 15h with AX-Reg. = E820h).
69h	Enable level 2 cache
6Bh	Programming of the chip set register according to the BIOS set-up and auto-detection table.
6Dh	1. Assignment of resources for all ISA plug and play devices. 2. Assignment of the port address for onboard COM-ports (only if an automatic junction has been defined in the setup).
6Fh	1. Initialising of the floppy controller 2. Programming of all relevant registers and variables (floppy and floppy controller).
73h	Optional feature: Call of AWDFLASH.EXE if: - the AWDFLASH program was found on a disk in the floppy drive. - the shortcut ALT+F2 was pressed.
75h	Detection and installation of the IDE drives: HDD, LS120, ZIP, CDROM...
77h	Detection of parallel and serial ports.
7Ah	Co-processor is detected and enabled.
7Fh	1. Switch over to the text mode, the logo output is supported. - Indication of possibly emerged errors. Waiting for keyboard entry. - No errors emerged, respective F1 key was pressed (continue): Deleting of the EPA- or own logo.
82h	1. Call the pointer to the "chip set power management". 2. Load the text font of the EPA-logo (not if a complete picture is displayed) 3. If a password is set, it is asked here.
83h	Saving of the data in the stack, back to CMOS.
84h	Initialising of ISA plug and play boot drives (also Boot-ROMs)
85h	1. Final initialising of the USB-host. 2. At network PC's (Boot-ROM): Construction of a SYSID structure table 3. Backspace the scope presentation into the text mode 4. Initialise the ACPI table (top of memory). 5. Initialise and link ROMs on ISA cards 6. Assignment of PCI-IRQs 7. Initialising of the advanced power management (APM) 8. Set back the IRQ-register.

Code	Description
93h	Reading in of the hard disk boot sector for the inspection through the internal anti virus program (trend anti virus code)
94h	1. Enabling of level 2 cache 2. Setting of the clock speed during the boot process 3. Final initialising of the chip set. 4. Final initialising of the power management. 5. Erase the onscreen and display the overview table (rectangular box). 6. Program "write allocation" at K6 CPUs (AMD) 7. Program "write combining" at P6 CPUs (INTEL)
95h	1. Program the changeover of summer-and winter-time 2. Update settings of keyboard-LED and keyboard repeat rates
96h	1. Multi processor system: generate MP-table 2. Generate and update ESCD-table 3. Correct century settings in the CMOS (20xx or 19xx) 4. Synchronise the DOS-system timer with CMOS-time 5. Generate an MSIRQ-Routing table..
C0h	Chip set initialising: - Cut off shadow RAM - Cut off L2 cache (apron 7 or older) - Initialise chip set register
C1h	Memory detection: - Auto detection of DRAM size, type and error correction (ECC or none) - Auto detection of L2 cache size (apron 7 or older)
C3h	Unpacking of the packed BIOS program codes into the random access memory.
C5h	Copying of the BIOS program code into the shadow RAM (segments E000 & F000) via chipset hook.
CFh	Testing of the CMOS read/write functionality
FFh	Boot trial over boot-loader-routine (software-interrupt INT 19h)

II Annex: Resources

A IO Range

The used resources depend on setup settings.

The given values are ranges, which are fixed by AT compatibility. Other IO ranges are used, which are dynamically adjusted by Plug & Play BIOS while booting.

Address	Function
0-FF	Reserved IO area of the board
1F0-1F7	IDE1
278-27F	LPT2
2F8-2FF	COM2
370-377	FDC2
378-37F	LPT1
3F0-3F7	FDC1
3F8-3FF	COM1

B Memory Range

The used resources depend on setup settings.

If the USB boot function or legacy support is enabled, the BIOS uses 16KByte RAM in the range from A0000-FFFFF. If the entire range is clogged through option ROMs, these functions do not work any more.

Address	Function
A0000-BFFFF	VGA-RAM
C0000-CFFFF	VGA-Bios
E0000-EFFFF	System-BIOS while booting
F0000-FFFFF	System-BIOS

C Interrupt

The used resources depend on setup settings.

The listed interrupts and their use are given through AT compatibility.

If interrupts must exclusively be available on the ISA side, they have to be reserved through the BIOS setup. The exclusivity is not given and not possible on the PCI side.

Address	Function
IRQ0	Timer
IRQ1	PS/2 Keyboard
IRQ2 (9)	
IRQ3	COM1
IRQ4	COM2
IRQ5	
IRQ6	FDC
IRQ7	LPT1
IRQ8	RTC
IRQ9	
IRQ10	
IRQ11	
IRQ12	PS/2 Mouse
IRQ13	FPU
IRQ14	IDE Primary
IRQ15	

D PCI Devices

All listed PCI devices exist on the board. Some PCI devices or functions of devices may be disabled in the BIOS setup. Once a device is disabled other devices may get PCI bus numbers different from the ones listed in the table.

AD	INTA	REQ	PCI	Dev.	Fct.	Controller / Slot
11	-	-	0	1	0	Host Bridge (LX) ID2080
11	A	-	0	1	1	VGA Graphics (LX) ID2081
11	A	-	0	1	2	En/Decryption Controller (LX) ID2082
17	D	4	0	7	0	LAN Intel 82551ER ID1209
20	A	0	0	10	-	External Slot 1
21	B	1	0	11	-	External Slot 2
22	C	2	0	12	-	External Slot 3
23	D	3	0	13	-	External Slot 4
25	-	-	0	15	0	ISA Bridge (CS5536) ID2090
25	-	-	0	15	2	IDE Controller (CS5536) ID209A
25	B	-	0	15	3	Multimedia Device (CS5536) ID2093
25	D	-	0	15	4	USB 1.0/1.1 OHCI Contr. (CS5536) ID2094
25	D	-	0	15	5	USB 2.0 EHCI Controller (CS5536) ID2095

E SMB Devices

Address	Function
10-11	Standard slave address
60-61	Reserved by BIOS
88-89	BIOS defined slave address
A0-A1	DIMM 1
A2-AF	Reserved by BIOS