

47" CLASS (46.9" DIAGONAL)

M4716CCBA

LCD  
MONITOR

## LCD Widescreen Full HD Capable Monitor



NATIVE DISPLAY RESOLUTION  
1920 x 1080 (WUXGA)

HIGH BRIGHTNESS  
500 cd/m<sup>2</sup>

CONTRAST RATIO  
1,300:1, 20,000:1 (DCR)

NEW! BUILT-IN READY (w/NC2000)

178° VIEWING ANGLE

VIEWING ANGLE and LIFE EXPECTANCY  
Enhanced in Portrait and Landscape Mode

NARROW BEZEL  
36mm

RJ-45 LAN CONTROL

RS-232C CONTROL

HDMI™/DVI WITH HDCP

 ENERGY STAR® 5.0 AND RoHS COMPLIANT

NEW! USB PLAYBACK

CONVENIENT EXTERNAL SPEAKER-OUT

INFORMATION DISPLAY FOR SERIAL NUMBER

SPLIT ZOOM (self video wall)  
Up to 5 x 5 matrix - adjusts for bezel width



OPTIONAL HIDDEN SPEAKERS (SP0000K) &  
OPTIONAL STAND (ST4710K)

3-YEAR LIMITED WARRANTY  
parts/labor


[www.LGolutions.com](http://www.LGolutions.com)



**LG**  
Life's Good

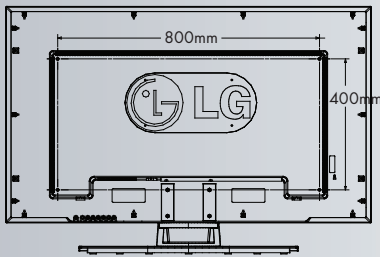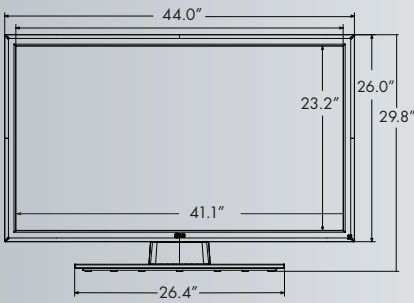

Rear Jack Pack Panel

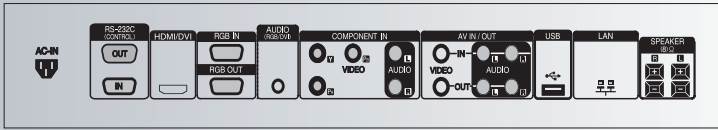

PANEL	
LCD Panel Type	47"
Display Area	46.9" diagonal
Aspect Ratio	16 : 9
Native Resolution	1920 x 1080 (Full HD)
Pixels (H x V x 3)	6,220,800
Brightness	500 cd/m <sup>2</sup>
Contrast Ratio	1,300:1, 20,000:1 (DCR)
Color Gamut	72%
T <sub>ni</sub>	75°C
Viewing Angle (H x V)	178° x 178°
Color Depth	1.06 Billion
Response Time	10ms (G to G)
Surface Treatment	Hard Coating (3H) Anti-glare
Lifetime	50,000 Hr., Portrait & Landscape
VIDEO	
Max Input Resolution	1920 x 1080 @ 60Hz (RGB, HDMI/DVI)
Recommended Resolution	1920 x 1080 @ 60Hz (RGB, HDMI/DVI)
H-Scanning Frequency	30 ~ 83kHz (RGB, HDMI/DVI)
V-Scanning Frequency	56 ~ 75 Hz (RGB), 60 Hz (HDMI/DVI)
Pixel Frequency	148.5 MHz (RGB, HDMI/DVI)
Sync Compatibility	Separate / Composite / Digital
Video Input	RGB, HDMI/DVI
Picture Mode	Vivid/Standard/Cinema/Sports/Game/Expert1/Expert2
Color Temperature	Warm/Medium/Cool
REAR INPUTS/OUTPUTS	
Component Video	Yes, 1 Hi-Res
PC Input via 15-Pin Sub "D"	Yes, 1 / 1
Composite Video Input/Output	1 / 1
Audio Output	Yes
Audio Inputs	Yes, 2 Plus PC Sound

HDTV Formats	Component : 720p/1080i HDMI: 720p/1080i/1080p
PC Formats	Auto Scaling to XUGA
HDMI/DVI with HDCP	Yes
RS-232C Input/Output	1 / 1, Female-to-Female Crossed Type
RJ-45	Yes
USB	Yes
External Speaker Out	Yes

AUDIO	
Auto Volume	Yes
Balance	Yes
Audio Power	20W (10W x 2)
Speaker On/off	Yes
Sound mode	Standard/Music/Cinema/Sports/Game

SPECIAL FEATURES	
NC2000(Optional PC) compatible	Yes
New Temperature Sensor	Yes
Split Zoom (Self Video Wall, Max 5 x 5)	Yes, supports natural mode
Source Selection	HDMI/DVI/RGB/Component/AV, SuperSign (Option)

Display control (RS-232C & Network, ez-Net Manager)	Single/Group WAN control, Scheduling, Instant Messaging, Self Diagnosis (Temp, FAN, Lamp, Power Detect), Alarm Service through mailing, Easy Tile mode setup, S/W upgrade via Network, USB Playback
---	---

Brightness/Contrast	Yes
Position/Size	Yes
Auto Config/Phase	Yes
Tracking	Auto/Clock/Phase
Language	English/French/Spanish/Italian/German/Portuguese/Korean/Japanese/Chinese/Russian

ISM Method	Normal/White Wash/Orbiter/Inversion
Advanced	Color Temp, Dynamic Contrast, Dynamic Color, Noise Reduction, Gamma, Black Level, Film Mode

Time	Clock/On/Off Timer/Sleep Timer/Auto Off, Power On Delay
------	---

Information Display	Serial Number, MNT S/W Version, LAN S/W Version, IP Address, MAC Address
---------------------	--

Input Label	Yes
Auto Power/Source Memory	Yes
Key Lock	Yes
DPM Select	Yes
Energy Saving	Yes, Level1/Level2/Level3
Power Indicator On/Off	Yes
Logo Light On/Off	Yes
File Play with USB	Yes

CABINET	
Color	Black
Bezel Width	36mm
Monitor Dimension (W×H×D)	44.0" x 26.0" x 4.7"
Monitor Weight	63.5 lbs
Monitor Dimension w/opt. stand (W×H×D)	44.0" x 29.8" x 11.9"
Weight w/opt. stand	72.4 lbs
Weight w/opt. stand and opt. speakers	74.0 lbs
Carton Dimensions (W×H×D)	47.4" x 30.6" x 13.1" (Head Only) 55.4" x 31.9" x 11.8" (Full Package)
Packed Weight	69.5 lbs (Head Only) 83.5 lbs (Full Package)

VESA™ Standard Mount Interface	800mm x 400mm, (APWX60) VESA Compatible only with respect to screw mounting interface dimensions and mounting screw specifications
--------------------------------	---

POWER	
Power Supply	100-240V~, 50/60Hz
Power Type	Built-in Power
Power Switch	Yes
Power Saving	Normal 240W DPMS 1W (RGB)/2W (HDMI) Switch Off 0.5W

STANDARD (CERTIFICATION)	
Safety	UL/c-UL/CB scheme/TUV
EMC	FCC Class "A"/VCCI/C-tick/CE/KCC
Erp/ENERGY STAR 5.0	Yes
RoHS compliant	Yes
UPC	719192187528
SERVICE/LIMITED WARRANTY	3 Years (Parts/Labor)

OPTIONAL ACCESSORIES	
Hidden Speakers (SP0000K)	Black
Speaker Dimensions (W x H x D)	1.6" x 12.9" x 2.2"
Speaker Weight (each)	0.8 lbs
Packaging Dimensions (W x H x D)	15.1" x 5.3" x 6.9"
Packed Weight	2.4 lbs (2 Speakers/1 Package)
ST4710K (stand)	Fits M4716CCBA
Stand Dimensions (W x H x D)	26.4" x 8.4" x 12.6"
Weight	8.9 lbs

www.LGolutions.com

LG Electronics U.S.A., Inc.  
Business Solutions Division  
2000 Millbrook Drive  
Lincolnshire, IL 60069

Customer Service: 888.865.3026  
www.LGolutions.com/support

Contact your LG Regional Sales Representative:  
Vertical Markets: 800.897.8788  
Channel: 800.897.8871  
Hospitality: 800.228.1236  
E-mail: info@LGolutions.com

SPEC\_M4716CCBA\_081033\_PR



All screen images are simulated. Dimensions and weights are approximate. Design, specifications, and features subject to change without notice.

© Copyright 2010 LG Electronics USA, Inc. All Rights Reserved. "LG Life's Good" is a registered trademark of LG Corp.

ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. In Plane Switching is a trademark of LG Philips LCD Ltd. VESA is a trademark of Video Electronics Standards Association. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. All other product and brand names are trademarks or registered trademarks of their respective companies.

Printed in the USA. October 2010

